


# Servomotor

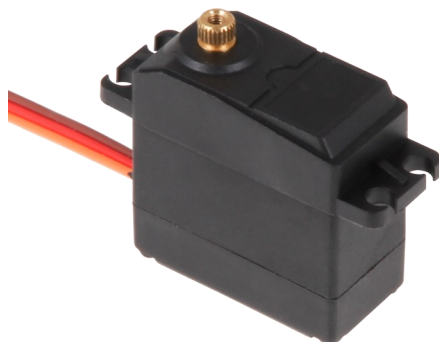

## Technical Specification

<b>Model</b>	COM-Motor02	
<b>Storage Temperature</b>	-20°C - 60°C	
<b>Operating Temperature</b>	-10°C - 50°C	
<b>Operating Voltage</b>	5V - 7.4V	
<b>Operating Current</b>	6V	80mA
	7.4V	100mA
<b>Speed (no load)</b>	6V	0.16s / 60°
	7.4V	0.15s / 60°
<b>Stall current</b>	6V	1.8A
	7.4V	2A
<b>Idle current</b>	6V	4mA
	7.4V	5mA
<b>Maximum Torque</b>	6V	18.3 kg-cm
	7.4V	21.5 kg-cm
<b>Operating Angle</b>	180° (500 - 2500µsec)	
<b>Neutral Position</b>	1500µsec	
<b>Dimensions (W x D x H)</b>	40 x 20 x 40.5mm	
<b>Scope of Delivery</b>	Servomotor	
<b>EAN</b>	4250236815831	