

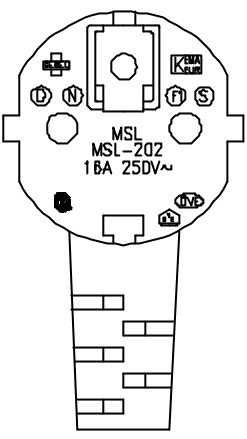
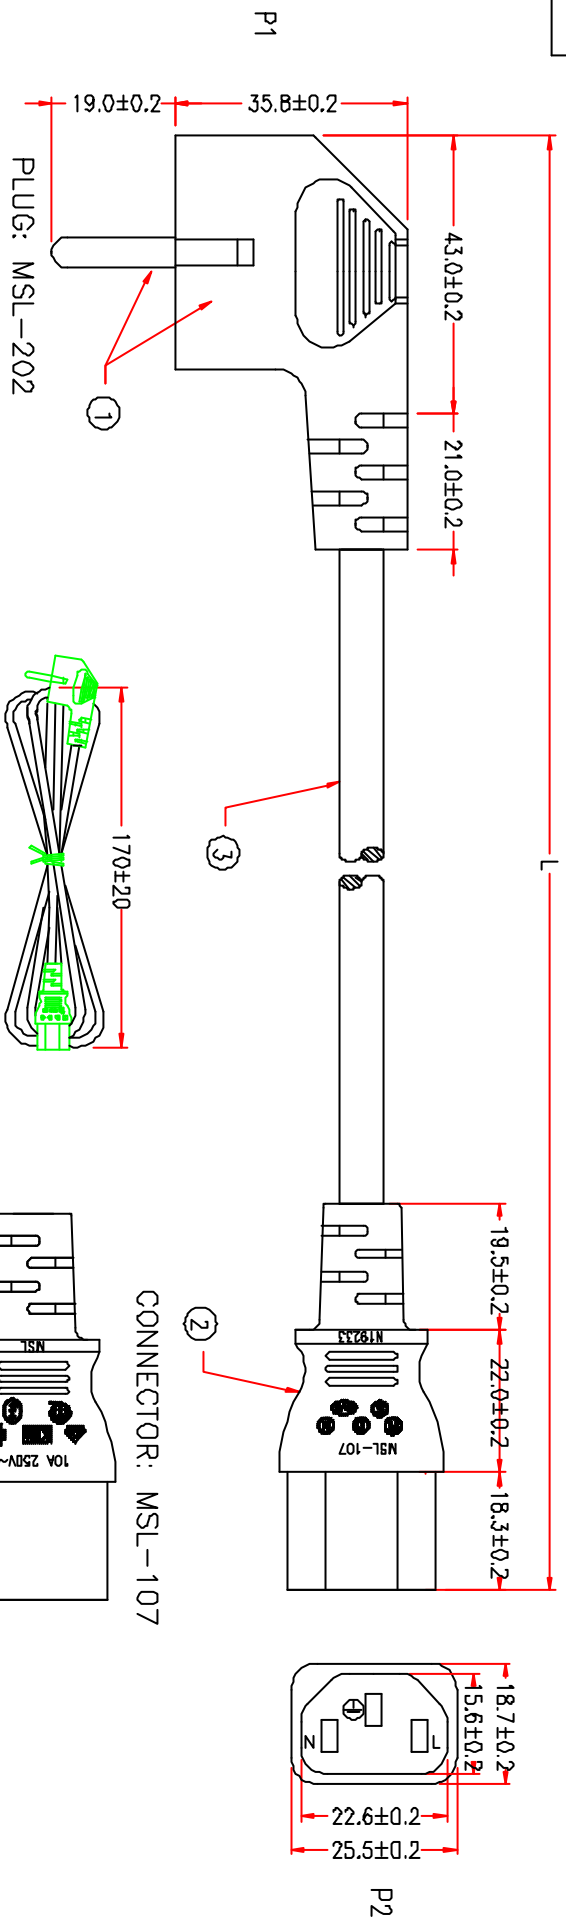


P1: M-010
P2: M-005

Customer No.: No.2



P/N	Length "L"
CAB 504-2 PBF	2000mm
CAB 504-3 PBF	3000mm

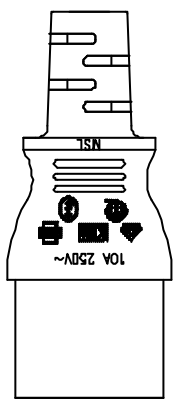


MARKING:

H05VV-F 3G 0.75mm² ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿
 N2D050 GTSА-3 3G 0.75mm²MSL

P1	P2	
L	L	BROWN
N	N	BLUE
E	E	GREEN/YELLOW

* NOTE: All relevant materials are complied with RoHS directive .

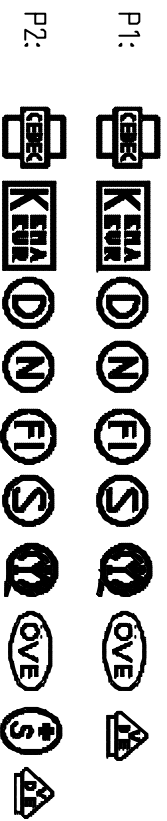

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

No.	DESCRIPTION	QTY	Supplier
1	MOLDED PVC 45P, COLOR GREY BRACKET: 98651A	1	M257
2	TERMINAL: 2x4mm SH408-2 BRACKET: YS-003	3	M256
3	H05 VV-F 3G 0.75mm ² , GTSА-3, 006.8mm, JACKET GREY, DRAWING No. EPH5V0107503C-004	1	M304

APPROVED	MSL ENTERPRISES CORP.
CHECKED	POWER SUPPLY CORDS & CORDS SETS
DRAWING	107202E3FSZA