



Feller Adapter


HmIP-ADA-FE

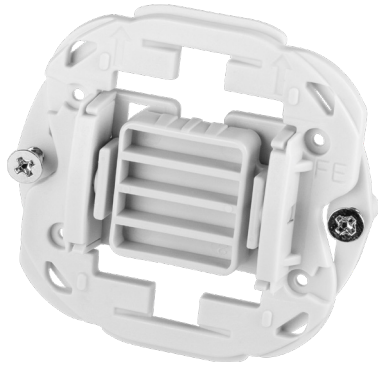

homematic IP
Smart Living. Simply Exciting.

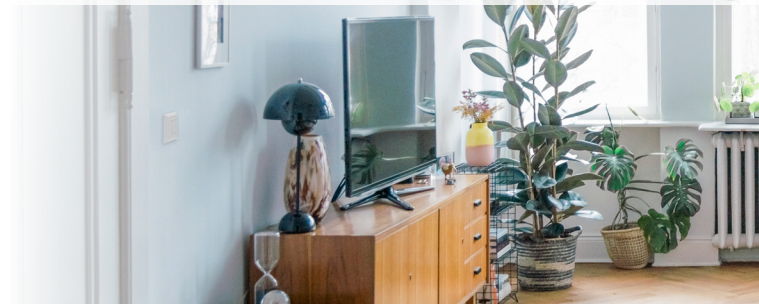

With the Homematic IP Feller adapter, the Homematic IP Switch Module for brand switches - International can be perfectly integrated into the Ediziodue switch series from Feller at low cost and with little installation work.

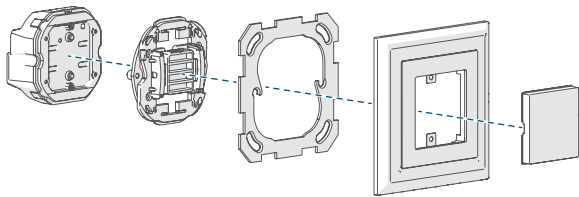

Schaltmodul für
Markenschalter

Switch module for
brand switches
Module de
commutation
pour interrupteurs
de marques

Passender
Adapter

Corresponding
adapter
Adaptateur
approprié

Befestigungs-
platte

Mounting plate
Plaque de
fixation

Rahmen &
Zwischen-
rahmen

Frame and
intermediate
frame
Cadre et cadre
intermédiaire

Wippe
Rocker

Bascule

Operation requires connection to one of the following solutions:

- Homematic IP access point with free smartphone app and free cloud service
- Third-party partner solutions

SIMPLE INTEGRATION

The Homematic IP Feller adapter allows you to easily and conveniently integrate your Homematic IP system into the "Ediziodue" switch system from Feller.

Offering an intelligent solution for your switch system, the adapter can be attached to a Homematic IP Switch Module for brand switches (HmIP-BSM-I) in just a few steps.

SAVE COSTS THE SMART WAY

Adapters for different switches enable switches from popular manufacturers to be replaced cost effectively with an intelligent Homematic IP installation. The design, colour and finish of already installed switches remain the same since existing frames and rockers can continue to be used.

COMPATIBILITY

A separate list on the adapter's compatibility with standard switch series can be found in the website download area at www.homematic-ip.com.

LOGISTICS DATA

Product reference	156111A2
EAN code	4047976561117
Short description	HmIP-ADA-FE
Packing unit	144
Packing dimensions	120 x 90 x 33 mm
Weight incl. packaging	63.3 g

PACKAGE CONTENTS

Homematic IP adapter for Feller
Operating manual

TECHNICAL SPECIFICATIONS

Installation	only in switch boxes (device boxes)
Degree of protection	IP20
Ambient temperature	-5 to +40 °C
Dimensions	58 x 58 x 16 mm
Weight	11.5 g