

D-SUB RIGHT ANGLE TYPE 7.2/9.4/13.84 mm







SPECIFICATION





Current Rate: 3 AMP
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 30m Ω Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: PBT+30% Glass Fiber(UL94V-0)
 Contact Pin: F: Phosphor Bronze or Brass
 M: Brass

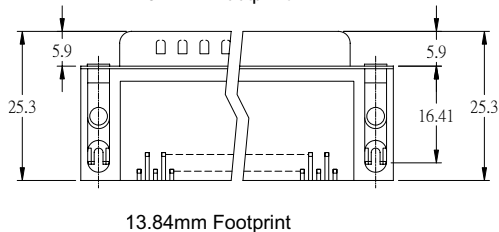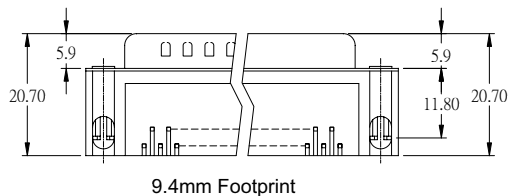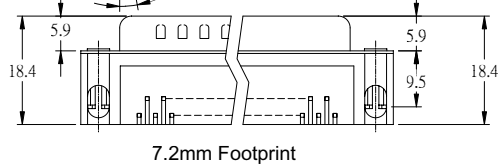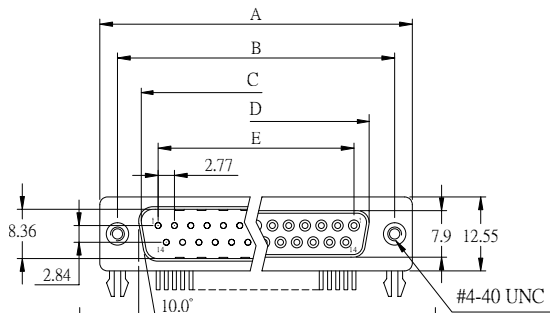

Dimensions					
Positions	A	B	C	D	E
9	30.81	24.99	16.92	16.33	11.08
15	39.14	33.32	25.50	24.66	19.39
25	53.04	47.04	38.96	38.38	33.24
37	69.32	63.50	55.42	54.84	49.86



ORDER INFORMATION

Bestell Code/Order Code: DPR - ① - ② - ③ - ④

- ① = Raster / Pitch
(without = 9,4 mm, S = 7,2 mm, T = 13,84)
- ② = Polzahl / No. of contacts (9,15,25,37)
- ③ = M: Stecker / Male , F: Buchse / Female
- ④ = Isolierkörper schwarz / Insulator black