



Cell Type FR14505/FR6/AA 6X Specification

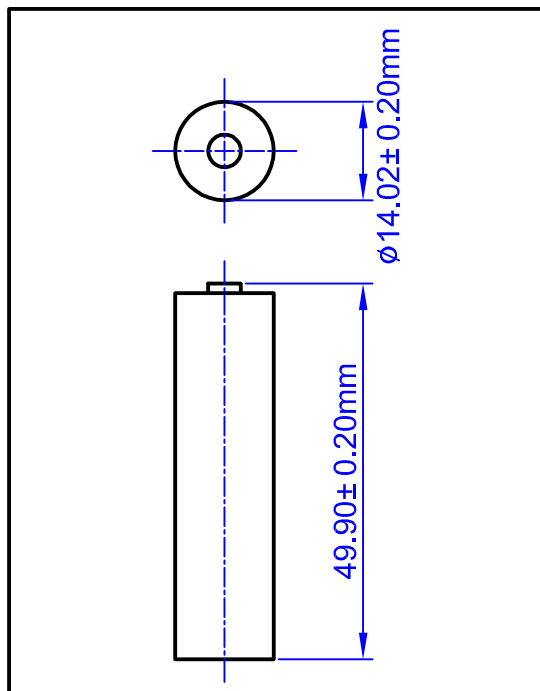


Nominal Voltage		1.5V
Dimensions (Max.)	Diameter	14.5mm
	Height	50.5mm
Ref.Weight		16.0g
Nominal Capacity(Ave.)		2700mAh
Continuous Standard Load		1000mA
Cut off Voltage		0.8V
Reference Capacity		2800mAh
Reference Continuous Load		200mA
Reference Cut off Voltage		1.0V
Maximum Continuous Discharge Current		2000mA
Maximum Pulse Discharge Current		3000mA
Operating Temperature		-40~+70*°C


Discharge Characteristics

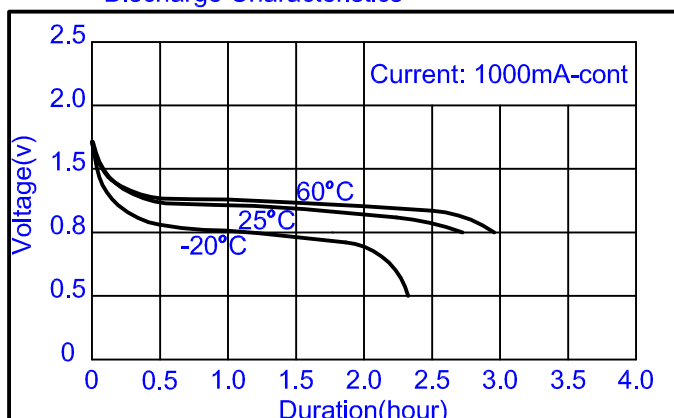


Discharge Characteristics

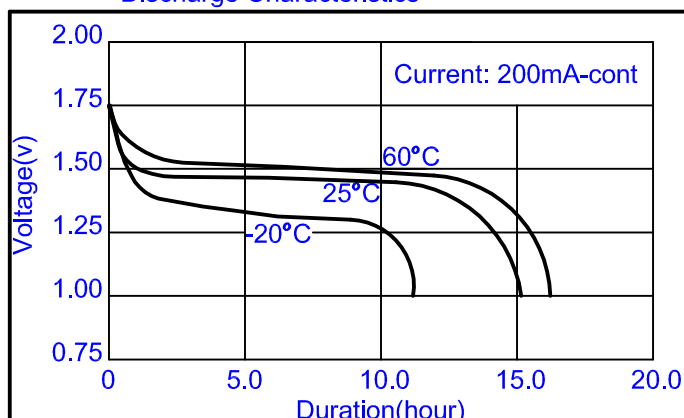

Pulse Discharge Characteristics

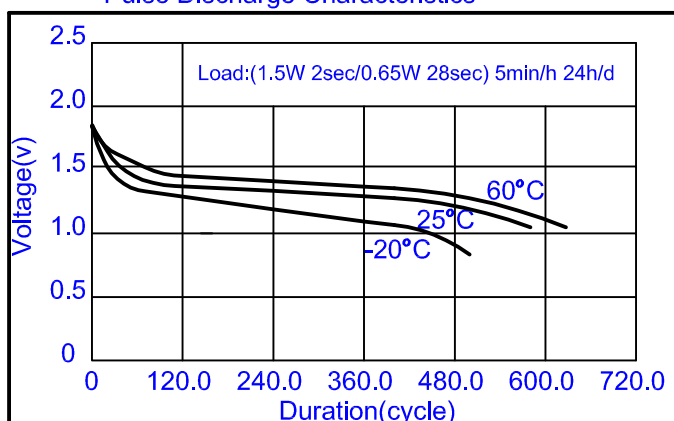

Discharge Characteristics

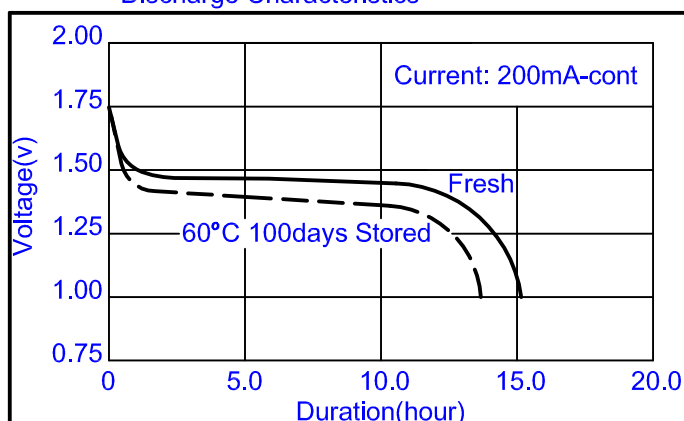

*Please consult Huiderui for use below and above -20°C to +60°C.

WARNING:

- KEEP AWAY FROM SMALL CHILDREN. IF SWALLOWED, PROMPTLY SEE DOCTOR.
- FIRE, EXPLOSION, BURN HAZARD. DO NOT OPEN BATTERY, DISPOSE OF IN FIRE, HEAT ABOVE 100 °C (212°F), EXPOSE CONTENTS TO WATER, RECHARGE, PUT IN BACKWARDS, MIX WITH USED OR OTHER BATTERY TYPES - MAY EXPLODE OR LEAK AND CAUSE PERSONAL INJURY.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.