

PRODUCT SPECIFICATION

GP GaN PD 65W Charger (3-port) Model: GM3A


Revision History

Revision	Date	Initiator	Reason for Change
0.0	28 Aug 2020	Kevin Chan	First release
0.1	1 Sep 2020	Kevin Chan	Added cable tie drawing

Prepared By	Approved By
Kevin Chan	Kevin Chan
Date: 1 Sep, 2020	Date: 1 Sep. 2020

GP Batteries

Product Specification

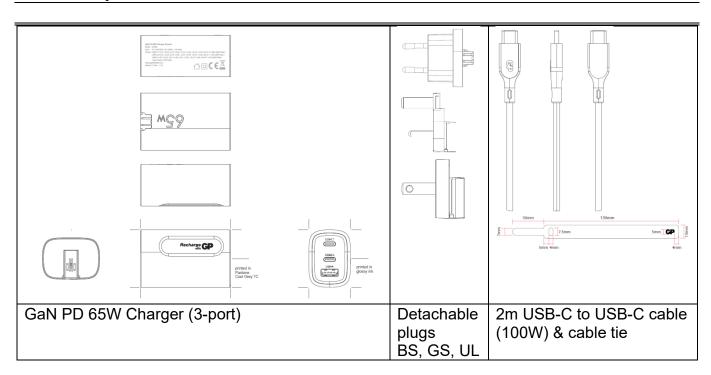

Model no.: GM3A

Product Name : GaN PD 65W Charger (3-port)
Description : GaN PD 65W Charger (3-port)

Application : Charge laptops, mobiles, tablets, cameras, Switch etc

Number of USB ports : USB-C x 2, USB-A x 1

Input : AC 100-240V, 50/60Hz, 1.5A Max.

Output : USB-C1/C2 DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.25A

USB-A DC 4.5V/5.0A, 5.0V/4.5A, 9.0V/3.0A, 12.0V/2.5A, 20.0V/1.5A

Total output power : 65.0W PD

Over voltage protection (OVP) : Yes
Over current protection (OCP) : Yes
Short circuit protection (SCP) : Yes
Over temperature protection (OTP) : Yes


Operation Temperature : 0°C to 40°C Storage Temperature : -10°C to 70°C

Product dimension (+/-0.5mm) $: 67 (L) \times 42 (W) \times 31 (H) mm$ (excluding plug)

Weight : 113g (excluding plug)

Compliance : CE-LVD, CE-EMC, ErP, CB, ROHS, REACH
Bundle accessories : 2m USB-C to USB-C cable (100W) / Cable tie

Warranty Period : 12 months from ex-factory date



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.