


SC/APC - SC/APC Simplex Jumper, I-V(ZN)H 1E 9/125μ
OS2, LSZH Yellow Jacket, x meter

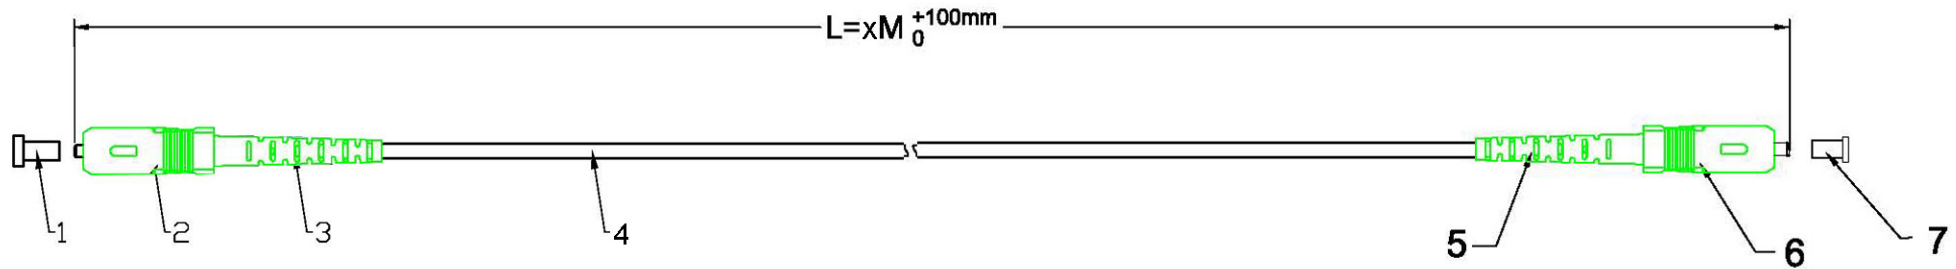

Specifications:

1. Insertion Loss: < 0.3dB @1310nm
Return Loss: UPC > 55dB@1310nm; APC > 65dB@1310nm
2. End surface test is according to OP-03-05001
3. Test standard: GR-326-CORE
4. Test report has to match the serial No.
5. RoHS compliant
6. Fiber cable according to IEC 60793-2
7. SC connector according to IEC 61754-4

**RoHS
compliant**

7	SC dust cover	1
6	SC/APC connector, Green	1
5	SC/APC 3.0 boot, Green	1
4	Ø3.0mm SM simplex OS2 9/125μ LSZH Yellow cable	
3	SC/APC 3.0 boot, Green	1
2	SC/APC connector, Green	1
1	SC dust cover	1
Item	Description	Qty



EFB

SC/APC - SC/APC Simplex Jumper, I-V(ZN)H 1E 9/125 OS2, LSZH
Yellow Jacket, x meter


Part No: O0944.X

Drawing No:

Page :1 of 3

Packing:

The corresponding label data for each cable assembly shall be affixed to the package

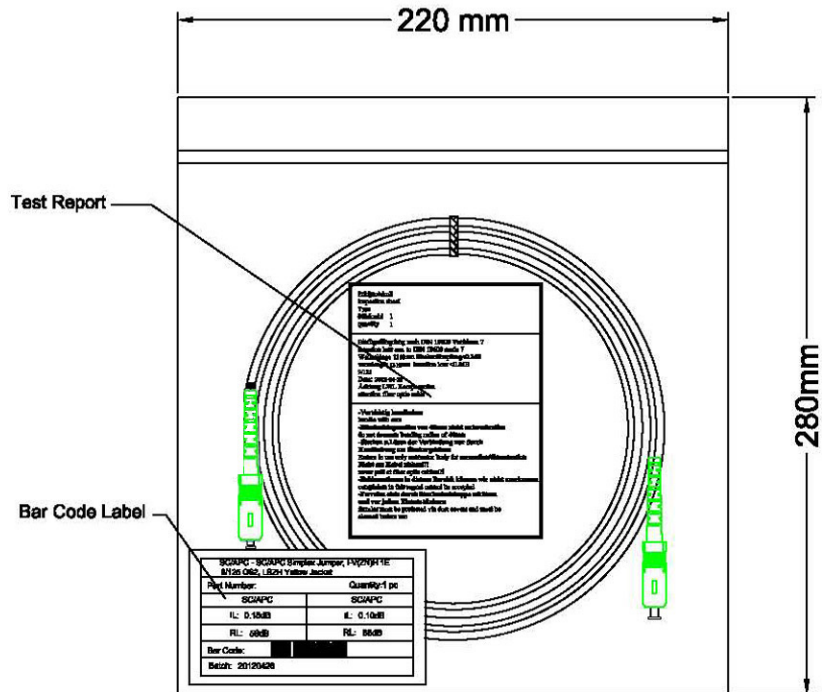

9# PE Bag(220mm x 280mm)

Prüfprotokoll inspection sheet Typ: Stückzahl 1 quantity 1
Einfüggedämpfung nach DIN 18600 Verfahren 7 insertion loss acc. to DIN 18600 mode 7 Wellenlänge 1310nm Steckerdämpfung <0.3dB wavelength 1310nm insertion loss <0.3dB 9/125 Date: 2012-04-26 Achtung LWL Komponenten attention fiber optic cable
-Vorsichtig handhaben handle with care -Mindestbiegeradius von 40mm nicht unterschreiten do not decrease bending radius of 40mm -Stecken u.Lösen der Verbindung nur durch Handhabung am Steckergehäuse Ensure to use only connector body for connection/disconnection Nicht am Kabel ziehen!!! never pull at fiber optic cables!!! -Reklamationen in diesem Bereich können wir nicht anerkennen complaints in this regard cannot be accepted -Ferrulen stets durch Staubkapselkappe schützen and vor jedem Einsatz säubern ferrules must be protected via dust covers and must be cleaned before use

Test Report

SC/APC - SC/APC Simplex Jumper, I-V(ZN)H 1E 9/125 OS2, LSZH Yellow Jacket	
Part Number:	Quantity: 1 pc
SC/APC	SC/APC
IL: 0.15dB	IL: 0.10dB
RL: 68dB	RL: 66dB
Bar Code:	
Batch:	20120426

Bar Code Label(100mmx60mm)

**RoHS
compliant**

<h1>E F B</h1>	
SC/APC - SC/APC Simplex Jumper, I-V(ZN)H 1E 9/125 OS2, LSZH Yellow Jacket, x meter	
Part No: O0944.X	
Drawing No:	Page :2 of 3

Indoor Cable Series (Simplex)

1. Characteristics

- . Aramid yarn strength member ensures tension resistance and long term stability in transmission
- . Small outer diameter, lightweight
- . Flame-retardant jacket, halogenfree
- . Low attenuation

2.Applications

- .Installation in conduits and shafts
- .Indoor distribution
- .Jumper and adapter cable
- .Connecting workstations inside buildings(FTTD)

3.Temperature Range


-20°C up to +70°C

4.Fiber Optic Cable Performance

- .Number of fibers: 1
- .Outer diameter: 3.0 mm
- .Nominal weight: 6.8 kg / km
- .Max. tension: 150 N (short - term)
80 N (long - term)
- .Min. Bending Radius: 20 D (Dynamic)
10 D (Static)
- .Max . Crush Resistance (N/100 mm²):500
- .Complies with TIA/EIA-568 B.3 & Bellcore GR-409-CORE & OFNR-UL/CSA FT-4
- .Maximum Attenuation: ≤ 0.4dB @Full spectrum
- .Dispersion Coefficient: ≤ 3.0ps/(nm.km) @1310nm
≤ 18ps/(nm.km) @1550nm

5.Cable Specification

- .Fiber type: Singlemode 9/125µm OS2
- .Yellow jacket , LSZH

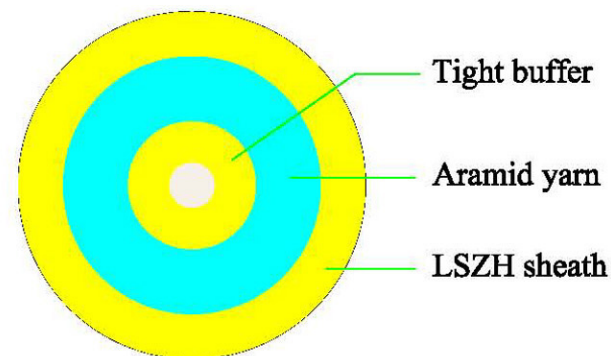

**RoHS
compliant**



EFB

SC/APC - SC/APC Simplex Jumper, I-V(ZN)H 1E 9/125 OS2, LSZH
Yellow Jacket, x meter

Part No: O0944.x

Drawing No:

Page :3 of 3