
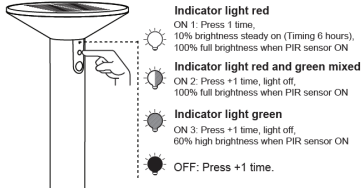

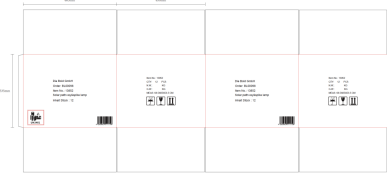


# Product Data Sheet

**BOLD**

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BOLD item code:                          | 13852                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Product name:                            | Solar path lamp IP44 with PIR                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Brand:                                   | BOLD LIGHTING                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Product picture:                         |                                                                                                                                                                                                                                                                                                                                                                           |
| Colour:                                  | gun grey                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operation:                               | USB-C: 5V/ DC,1A<br>3,7V (Li-ion rechargeable battery)                                                                                                                                                                                                                                                                                                                                                                                                     |
| Power consumption/ lumen of whole light: | Max.3.5W, 220lm                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| LED module:                              | 2.5W, 280lm( 33pcs SMD LED, warm white, non-replaceable)                                                                                                                                                                                                                                                                                                                                                                                                   |
| Solar panel:                             | 400mA, 5V                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Colour temperature:                      | 3000K                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Colour rendering index (CRI):            | 95                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Charging time:                           | 8h by solar, 4.5h by USB cable                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Run time:                                | 240 times detection (In mode I), 300 times detection (In mode II), 500 times detection (In mode III)                                                                                                                                                                                                                                                                                                                                                       |
| Rechargeable battery:                    | 1 x 3.7V DC, 2000mAh, Li-Ion, Type 18650, included, non-replaceable                                                                                                                                                                                                                                                                                                                                                                                        |
| Safety protection class:                 | Class III                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| IP protection degree:                    | IP44                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Life time(L70B50):                       | 25000 h                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Operating temperature:                   | 0°C to +45° C                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Storage temperature:                     | -20°C to +50° C                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimmable:                                | No                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Dimensions:                              | Ø160x600(H)mm                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Material:                                | Plastic and Aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Weight of the unit:                      | 517g                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Detailed construction:                   | <p>Solar pathway lamp IP44 with PIR black sensor, CRI95<br/>LED module: 2.5W/280lm 3000K<br/>material:Aluminum+plastic(ABS+PC)<br/>Color: gun grey<br/>New working modes!<br/>2 installation ways: Screwed &amp; spike<br/>USB-C charge port, No USB cable<br/>Twilight sensor ( Turn on at dusk only)<br/>with 1x 3.7V, 2000mAh,18650 L-Ion rechargeable battery</p>  |
| Content of delivery:                     | 1x Product, 3x fixing screws, 3x dowels, 1x earth spike, 1x Operation manual                                                                                                                                                                                                                                                                                                                                                                               |
| Package:                                 | Brown box with color sticker                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EAN code:                                | 4260663511756                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Sale packaging size:                     | 63.5x16.5x17CM<br>                                                                                                                                                                                                                                                                                                                                                     |
| Outer carton size:                       | 68.5X65X53.5CM<br>                                                                                                                                                                                                                                                                                                                                                     |
| Loading qty per export                   | 12                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Product Warranty:                        | 2 years                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Remarks:                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |