

# NIGHT BREAKER LED SMART H16



**Street-Legal<sup>1)</sup>**

The NIGHT BREAKER LED family - OSRAM's first street-legal<sup>1)</sup> LED retrofit lamps.



**Up to 6 times longer lifetime<sup>2)</sup>**

See and be seen with OSRAM. Cool white color temperature similar to daylight. For more safety on the road, especially when driving at night and in adverse weather conditions.



**Wider Fog Beam<sup>3)</sup> & 6000K**

Vibration resistant, environmentally friendly, cost-efficient and validated according to the ingress protection class IP54.



**5 Year OSRAM Guarantee<sup>4)</sup>**

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.



Exceptionally bright, innovatively compact, particularly durable and, of course, street-legal<sup>1)</sup>. That's the new NIGHT BREAKER LED SMART fog lamps from OSRAM.

With the street-legal<sup>1)</sup> NIGHT BREAKER LED SMART fog lamps, it is possible to switch from traditional halogen lamps to advanced OSRAM LED technology for fog light applications.

They can serve as the perfect complement to your already installed OSRAM street legal<sup>1)</sup> LED or HID lamps. For an ideal combination or as a perfect addition to OSRAM NIGHT BREAKER LED lamps and, of course, as a comprehensive LED light upgrade.

OSRAM's street-legal<sup>1)</sup> LED lamps set new standards in terms of innovation, precision, versatility and functionality. They lead the way in terms of brightness, lifetime, vehicle compatibility, design and much more.

With the street-legal<sup>1)</sup> NIGHT BREAKER LED SMART fog lamps you can now upgrade the function of your fog lights of your vehicle to state-of-the-art LED technology. These LED replacement lamps are suitable as a replacement for conventional lamps and bases.

They offer a modern and bright white light with a color temperature of up to 6000 Kelvin and impress with a wider fog beam in comparison to traditional halogen fog lamps. For cool white light wherever and whenever it might be needed.

In comparison to standard lamps, such as halogen lamps, these LED retrofit lamps consume up to 80% less energy and convince thanks to the LED technology and the specially developed vibration-resistant design, with up to 6 times longer life time<sup>2)</sup>. They have been tested in our DIN-certified environmental simulation laboratory for extreme external influences in terms of the ingress of water and dust and validated with IP protection class IP54.

You can now replace your conventional vehicle lamps with OSRAM's revolutionary NIGHT BREAKER LED retrofit lamps and experience trend-setting brightness with road approval<sup>1)</sup>

Additionally, OSRAM offers a dedicated guarantee on all NIGHT BREAKER LED retrofit lamps<sup>3)</sup>.

Technical data

Product information

|                                             |                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application (Category and Product specific) | Fog lamp                                                                                                                                                                                                                                                                                                                 |
| Product legal advice 1                      | 1) Approved LED light source - only applies to the respective countries in which there is approval or to which an equivalent approval applies and the vehicle models and light functions currently listed in the compatibility list. For more details see <a href="http://www.osram.com/nb-led">www.osram.com/nb-led</a> |
| Product legal advice 2                      | 2) In comparison to traditional Halogen lamps                                                                                                                                                                                                                                                                            |
| Product legal advice 3                      | 3) For precise conditions please refer to: <a href="http://www.osram.com/am-guarantee">www.osram.com/am-guarantee</a>                                                                                                                                                                                                    |

General Product Information

|                        |                 |
|------------------------|-----------------|
| Global order reference | 64219DWNBSM-2HB |
|------------------------|-----------------|


Electrical Data

|                       |       |
|-----------------------|-------|
| Power input           | 4 W   |
| Power input tolerance | rated |
| Nominal wattage       | 4 W   |
| Nominal voltage       | 12 V  |

Photometric Data

|                         |            |
|-------------------------|------------|
| Color temperature       | 6000 K     |
| Nominal luminous flux   | 500 lm     |
| Luminous flux tolerance | ±20 %      |
| Light color LED         | Cool white |

Physical Attributes & Dimensions

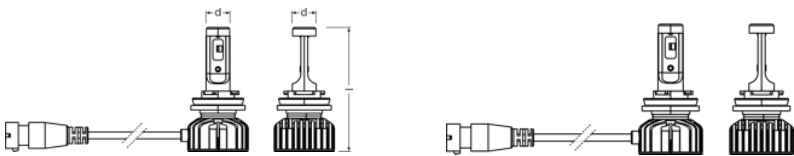

|                |         |
|----------------|---------|
| Product weight | 63.00 g |
|----------------|---------|

Product datasheet

|        |         |
|--------|---------|
| Length | 72.0 mm |
|--------|---------|

Lifetime Data

|             |         |
|-------------|---------|
| Lifespan Tc | 3000 hr |
| Lifespan B3 | 1500 hr |

Capabilities

|            |     |
|------------|-----|
| Technology | LED |
|------------|-----|

Environmental & Regulatory Information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                                                                                                    |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Primary article identifier                                            | 4062172410274                                                                                      |
| Candidate list substance 1                                            | Lead                                                                                               |
| CAS No. of substance 1                                                | 7439-92-1                                                                                          |
| Safe use instruction                                                  | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration no. in SCIP database                                      | cf65ecf8-e4a1-47cb-8395-25cd0650c1cf                                                               |

Logistical Data

| Product code  | Product description            | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume               | Gross weight |
|---------------|--------------------------------|---------------------------------|-----------------------------------------|----------------------|--------------|
| 4062172410274 | NIGHT BREAKER<br>SMART H16 LED | HFB<br>2                        | 136 mm x 56 mm x<br>162 mm              | 1.23 dm <sup>3</sup> | 231.00 g     |
| 4062172410281 | NIGHT BREAKER<br>SMART H16 LED | Shipping carton box<br>4        | 149 mm x 125 mm x<br>180 mm             | 3.35 dm <sup>3</sup> | 545.00 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File                                                                                |                                                      |
|-------------------------------------------------------------------------------------|------------------------------------------------------|
|  | User instruction<br>GPRS_Safety symbols instructions |

**Safety advice**

Application advice: For more detailed application information and graphics please see the product datasheet and user manual.

## Product datasheet

Translation advice: Actual Size - Plastic free packaging - Light comparison- Approval Document- Accessories - Application  
– Content - Technology Comparison- Benefits -

### Legal advice

1) Approved LED light source - only applies to the respective countries in which there is approval or to which an equivalent approval applies and the vehicle models and light functions currently listed in the compatibility list. For more details see [www.osram.com/nb-led](http://www.osram.com/nb-led)

2) In comparison to traditional Halogen lamps

3) For precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

### Application advice

For more detailed application information and graphics please see product datasheet.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



# OSRAM