

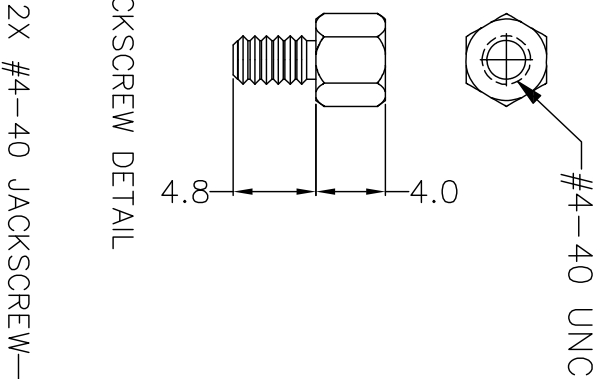
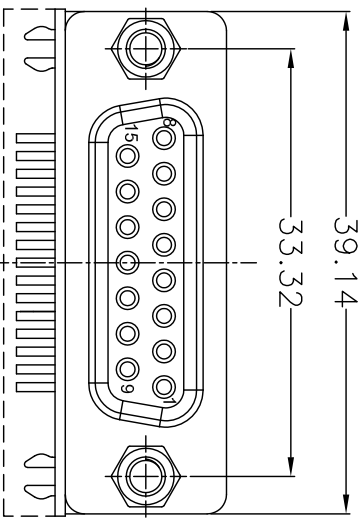


REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	10/12/09
		APPROVED
		Liu Jian Ping


WIRING TABLE	
DB15 PIN #	TERMINAL BLOCK #
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
SHELL	SHL

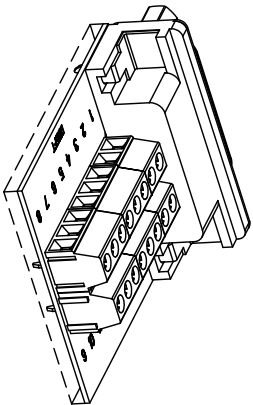


2X #4-40 JACKSCREW

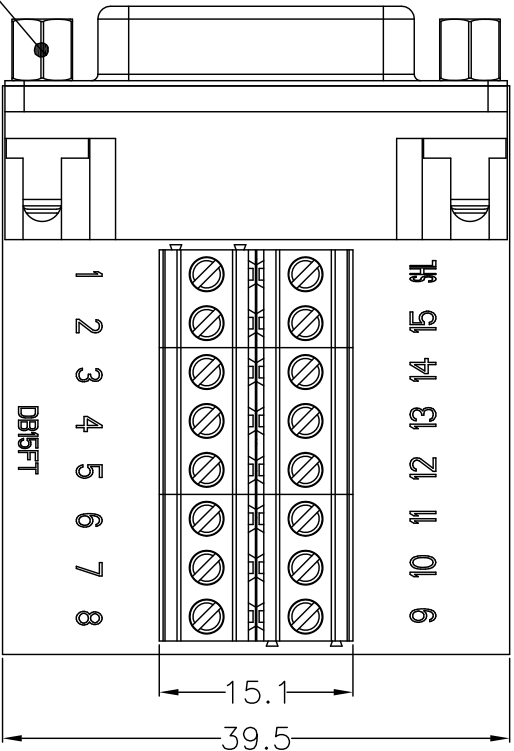

FEMALE 15P CONTACT
D-SUB CONNECTOR

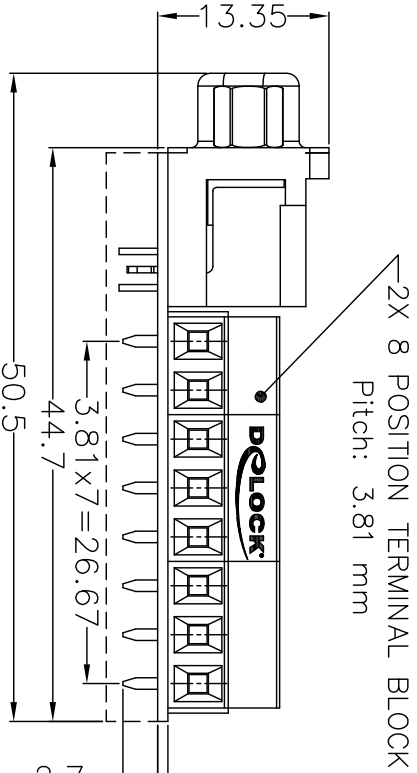

2X 8 POSITION TERMINAL BLOCK
Pitch: 3.81 mm

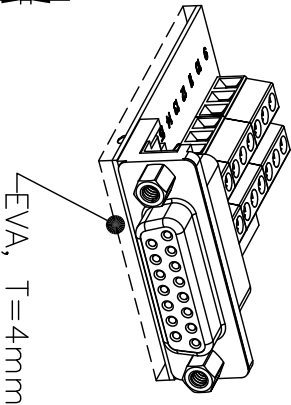

Part name:
Adapter terminal block > Sub-D 15 pin female

Electrical Character:

- 1> 100% open&short testing
- 2> With understanding voltage:DC 500 V 0.01 Sec.
- 3> Insulation Resistance: 50M Ohm (Min)
- 4> Conductive Resistance: 2 Ohm(Max)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN mm		APPROVALS		DATE
DIMENSIONAL TOLERANCES:		DRAWN BY	May	2/23/2011
X = ± 0.3		CHECKED BY	Gang	14/24/2011
.XX = ± 0.2		APPROVED BY	Steven	12/27/2010
.XXX = ± 0.1		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
ANGULAR TOLERANCES: ALL = $\pm 1^\circ$		COLOR VARIATIONS MAY OCCUR		
PROJECTION				

DELOCK
we move the world

Item no.

65274

Barcode: 4043619652747

File: 88072