



WIRING TABLE




DB37 PIN #	TERMINAL PIN #
1	1
2	2
3	3
4	4
5	5
6	6
.....
.....
.....
.....
.....
.....
.....
32	32
33	33
34	34
35	35
36	36
37	37
SHELL	SHL



JACKSCREW DETAIL

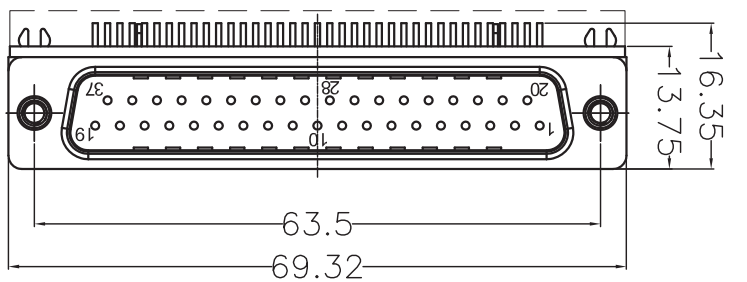

2X #4-40 JACKSCREW

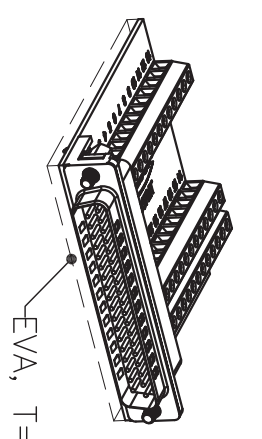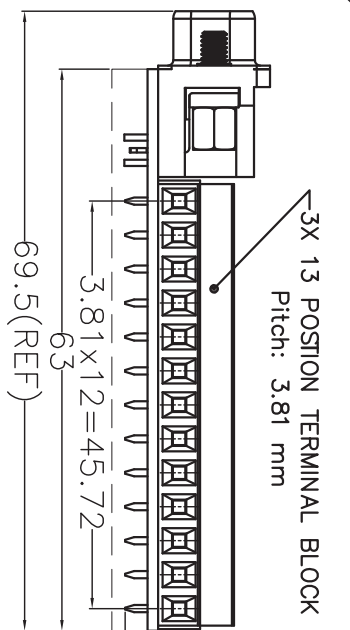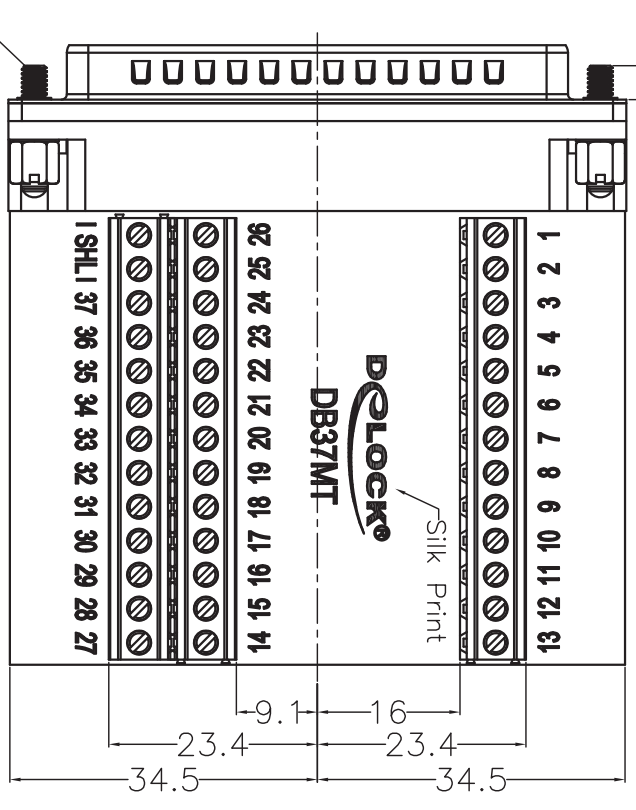

Part name:
Adapter terminal block > Sub-D 37 pin male

Electrical Character:

- 1> 100% open&short testing
- 2> With understanding voltage:DC 500 V 0.01 Sec.
- 3> Insulation Resistance: 50M Ohm (Min)
- 4> Conducive Resistance: 2 Ohm(Max)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN mm	
DIMENSIONAL TOLERANCES:	
X = ±0.3	XX = ±0.2
.XXX = ±0.1	
ANGULAR TOLERANCES:	
ALL = ±1°	
PROJECTION	

APPROVALS	DATE
DRAWN BY Mog	1/20/2012
CHECKED BY Gang	1/20/2012
APPROVED BY Steven	1/31/2012

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

DELOCK®
We move the world

Item no. 65320

Barcode: 4043619653201

File: 88072

REVISIONS		DATE	APPROVED
REV	DESCRIPTION	7/11/11	Lu Sen Ping
A	INITIAL RELEASE		