


ENERGIZER L91-FR6

Specifications



Industry Standard Dimensions (millimeters)

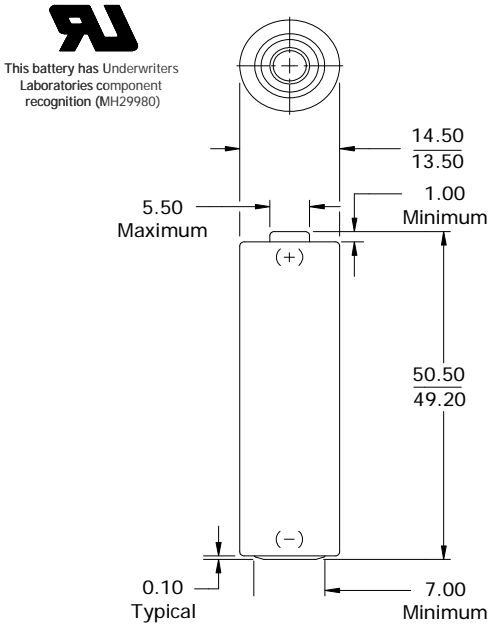


<b>Classification:</b>	"Cylindrical Lithium"
<b>Chemical System:</b>	Lithium/Iron Disulfide (Li/FeS <sub>2</sub> )
<b>Designation:</b>	IEC-FR6
<b>Nominal Voltage:</b>	1.5 Volts
<b>Storage Temp:</b>	-40°C to 60°C
<b>Operating Temp:</b>	-40°C to 60°C
<b>Typical Weight:</b>	14.5 grams
<b>Typical Volume:</b>	8.0 cubic centimeters
<b>Max Discharge:</b>	2.0 Amps Continuous
(single battery only)	3.0 Amps Pulse (2 sec on / 8 sec off)
<b>Max Rev Current:</b>	2 uA
<b>Typical Li Content:</b>	0.98 grams
<b>Self Life:</b>	90 to 150 monthms*
<b>Shelf Life:</b>	15 years at 21°C (90% of rated capacity)
<b>Transportation:</b>	For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations

\* For additional information, please reference the [IR technical white paper](#)

**Milliamp-Hours Capacity**

Constant Current Discharge to 0.9 Volts at 21°C

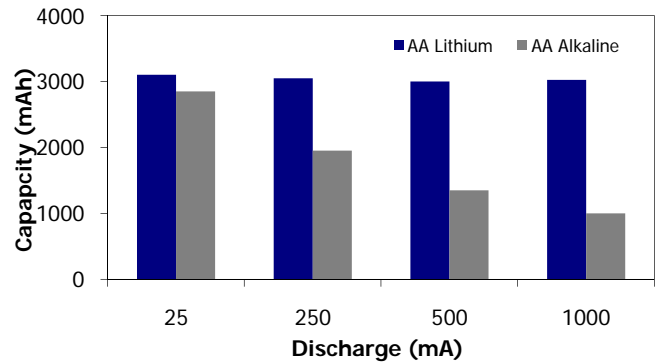


**Milliwatt-Hours Capacity at Cold/Room Temperature**

Constant Power Discharge to 1.0 Volts at 0°C and 21°C

Recommended Lithium Operating/Storage Temperature: -40°C to 60°C


**Cold Temperature (0°C)**

Constant Power Discharge

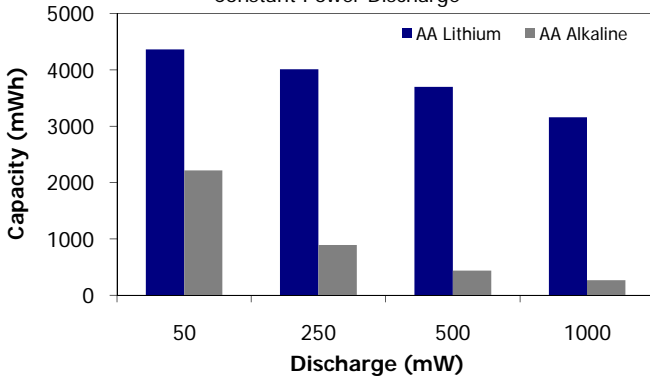

**Room Temperature (21°C)**

Constant Power Discharge

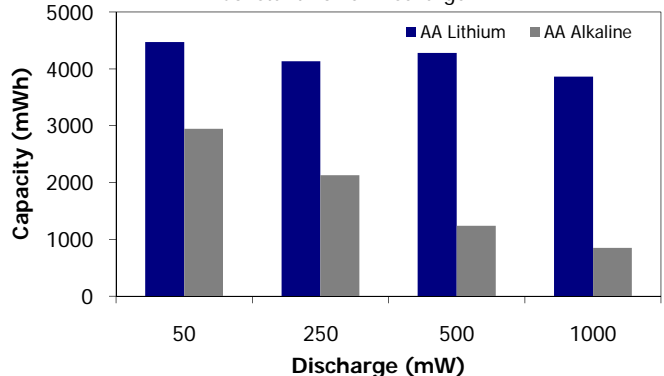

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

# ENERGIZER L91-FR6


**AA**

## Typical Discharge Curve Characteristics

Constant Current Discharge at 21°C (low and high drains)


### Low Drain Performance

50mA Continuous (21°C)

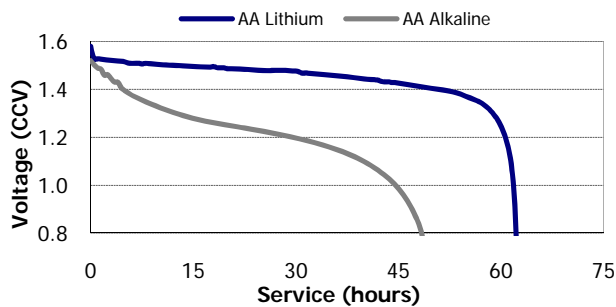


### High Drain Performance

1000mA Continuous (21°C)

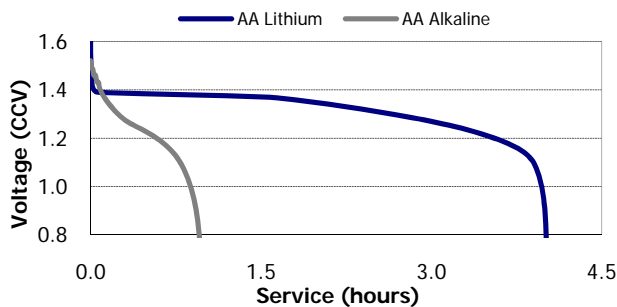


### Constant Power Performance

Typical Characteristics to 1.0 Volts (21°C)

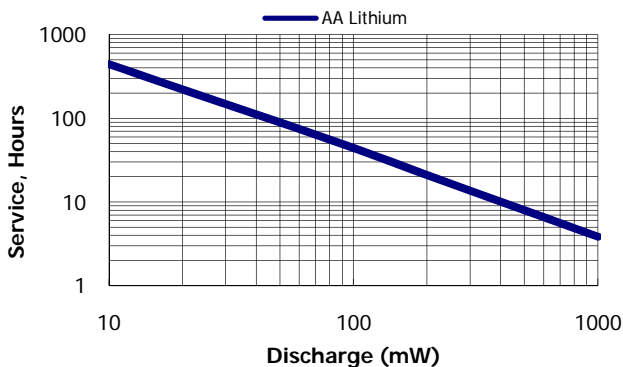


### Constant Current Performance

Typical Characteristics to 1.0 Volts (21°C)

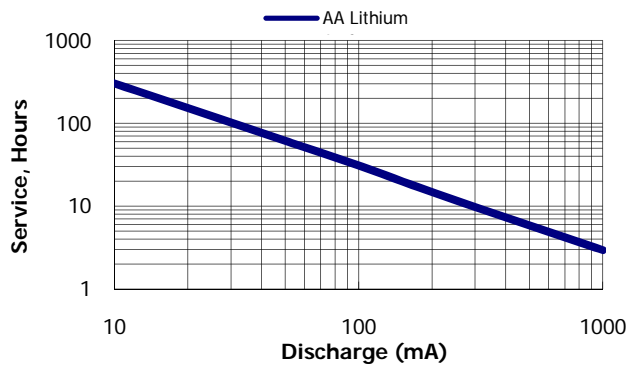


### Application Tests (21°C)

REMOTE: 24 ohm 15 sec/min 8 hrs/day  
RADIO: 43 ohm 4 hrs/day

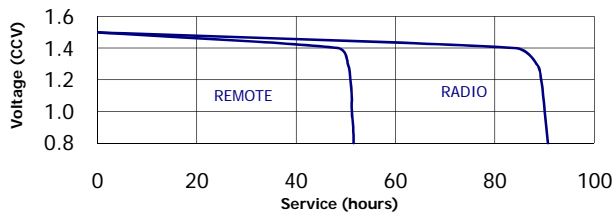


### Application Tests (21°C)

CD/GAMES: 250 mA 1 hr/day  
DIGITAL AUDIO: 100 mA 1 hr/day

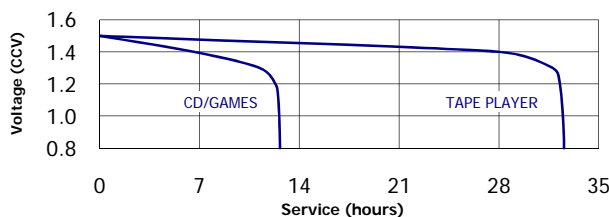


### Application Tests (21°C)

TOOTHBRUSH: 500 mA 2/13 min 24 hrs/day  
PORTABLE LIGHTING: 3.3 ohm LIF  
TOY: 3.9 ohm 1 hr/day

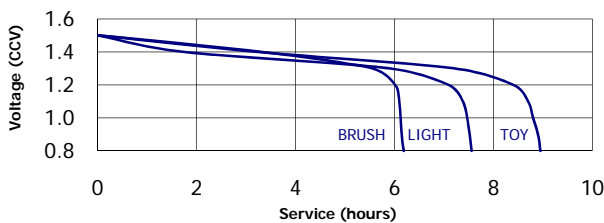

### Industry Standard Tests (21°C)

PHOTOFLASH: 1K mA 10 sec/min 1 hr/day  
DIGITAL CAMERA: 1.5/.65K mW 2/.1/27.9s 10X

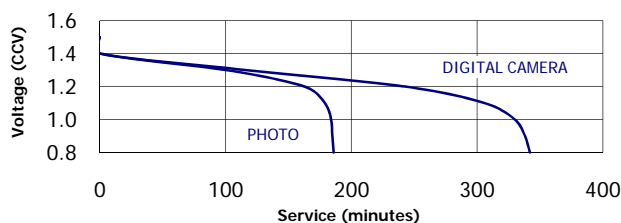

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.