






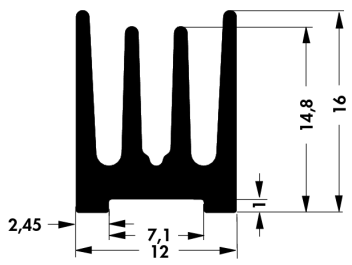



Kühlkörper für DIL-IC

			
Art. Nr.	für Gehäuse	↔ [mm]	R _{th} [K/W]
ICK 6 8 L	6/8 polig	8,5	83
ICK 14 16 L	14/16 polig	19,0	46
ICK 20 L	20 polig	25,0	34
			
Art. Nr.	für Gehäuse	↔ [mm]	R _{th} [K/W]
ICK 14 16 B	14/16 polig	6,3	50,0
ICK 24 B	24 polig	33,0	13,0
ICK 28 B	28 polig	37,0	11,5
ICK 36 B	36 polig	47,0	9,5
ICK 40 B	40 polig	51,0	8,5
ICK 1000 B	–	1000,0	–

andere Längen auf Anfrage
Oberfläche: schwarz eloxiert

mit Klemmbügel

			
Art. Nr.	für Gehäuse	↔ [mm]	R _{th} [K/W]
ICK 14 H	14 polig	18,0	20
ICK 16 H	16 polig	20,5	18
ICK 18 H	18 polig	23,0	16
ICK 1000 H	–	1000,0	–

andere Längen auf Anfrage
Oberfläche: schwarz eloxiert

Aluminiumoxydscheiben
 Glimmerscheiben
 Kapton-Isolierscheiben
 Isolierspannstücke

→ E 9 – 10
 → E 11
 → E 8
 → E 38

Profile für Leiterkartenbauteile
 Leiterplattenkühler
 Lochbilder
 Profile für Leiterplattenmontage

→ A 91
 → A 89
 → A 21
 → A 89 – 110

B 36

A

B

C

D

E

F

G

H

I

K

L

M

N