



廣隆光電科技股份有限公司
KUNG LONG BATTERIES INDUSTRIAL CO., LTD.

Taiwan

南投市南崗工業區自立三路6號
No.6, Tzu-Li 3 Rd. Nantou City 54067, Taiwan
TEL: +886-49-2254-777
FAX: +886-49-2255-139
http://www.klb.com.tw
E-mail: sales@mail.klb.com.tw

Vietnam

LE LONG VIETNAM CO., LTD.
Cụm Công Nghiệp Đức Mỹ,xã Đức Hòa Đông,
Huyện Đức Hòa,Tỉnh Long An, 81999 Việt Nam
Tel: +84-72-3779666
http://www.lelong.com.vn

USA

1 Cape Danbury, Newport Beach, CA 92660
TEL: +1 949-307-8720 / +1 949-328-7936
FAX: +1 949-266-9917
http://www.kunglong.com
E-mail: sales@kunglong.com

www.klb.com.tw



AC Design 04-27071159

LONG BATTERY
Product Catalog



Backup Power
For UPS, Security, Fire Alarm System



Electric Vehicle Power
For Mobility Scooter, Electric Vehicle,
Golf Trolley, Medical



Green Power
For Solar and Renewable Energy,
Deep Cycle



Cyclic Power
For Multi-Purpose



High Power
For Telecommunication,
UPS System



Long Life Power
For Telecommunication,
UPS System



INDEX



HTP & TPK SERIES




SPECIFICATION


MAIN APPLICATION	BATTERY TYPE	NOMINAL VOLTAGE (V)	NOMINAL CAPACITY (Ah)		DIMENSION								WEIGHT (APPROX.)		ASSEMBLY FIGURE	
			5HR	10HR	L	W	H	L	W	H	HT OVER TERMINAL		lbs	kg	TERMINAL POSITION	TERMINAL TYPE
			in	in	in	mm	mm	mm	in	mm						
HIGH TEMPERATURE BATTERIES																
● ● ● ● ● ●	HTP75-12N	12	63.75	75	10.24	6.69	7.95	260	170	202	8.15	207	53.20	24.20	9	F8
● ● ● ● ● ●	HTP100-12AN	12	85	100	12.09	6.61	8.19	307	168	208	8.43	214	64.90	29.50	9	F8
● ● ● ● ● ●	HTP100-12N	12	85	100	13.31	6.69	8.35	338	170	212	8.54	217	71.50	32.50	9	F8
● ● ● ● ● ●	HTP150-12N	12	127.5	150	19.02	6.69	9.45	483	170	240	9.45	240	100.00	45.50	9	F18
● ● ● ● ● ●	HTP200-12N	12	170	200	20.55	9.37	8.62	522	238	219	8.82	224	146.00	66.50	22	F18
12V FRONT TERMINAL BATTERIES																
○ ○ ○ ○ ○ ○	TPK12100A	12	85	100	19.96	4.17	9.25	507	106	235	9.25	235	67.80	30.80	23	F18
○ ○ ○ ○ ○ ○	TPK12125	12	106.25	125	21.65	4.33	11.34	550	110	288	11.34	288	85.80	39.00	23	F18
○ ○ ○ ○ ○ ○	TPK12150	12	127.5	150	21.65	4.33	11.34	550	110	288	11.34	288	105.00	47.50	23	F18
○ ○ ○ ○ ○ ○	TPK12155	12	131.8	155	21.65	4.33	11.34	550	110	288	11.34	288	108.00	49.00	23	F18

CHARACTERISTIC

HTP & TPK SERIES

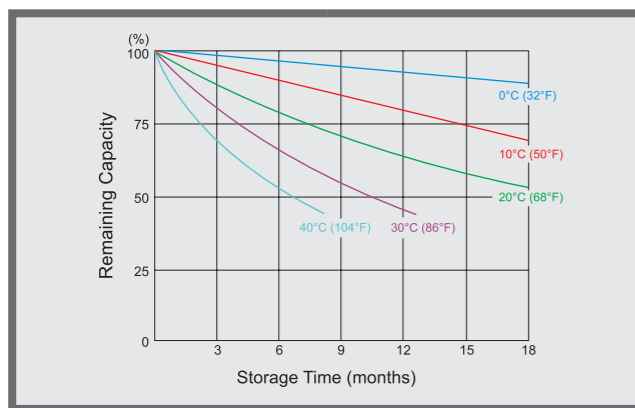


Capacity Retention Characteristic

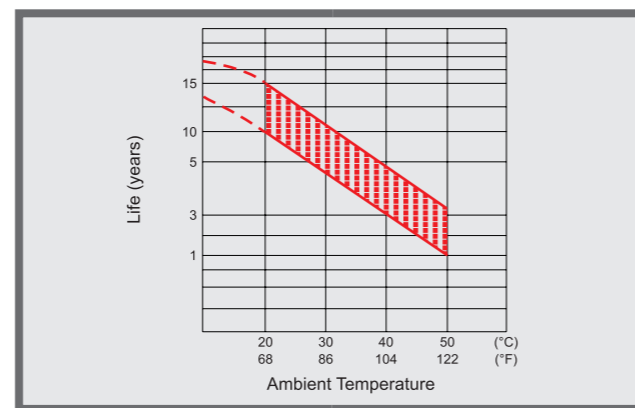


Trickle (or float) Service Life

HTP SERIES

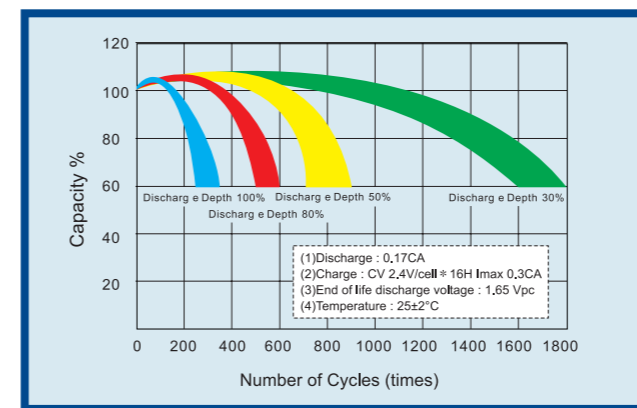


Cycle Service Life


TPK SERIES

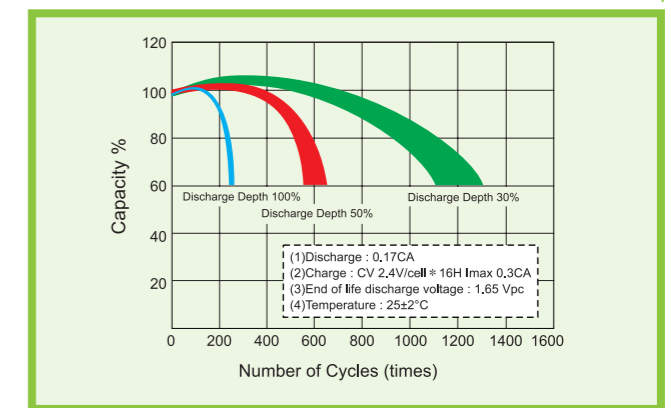


Cycle Service Life

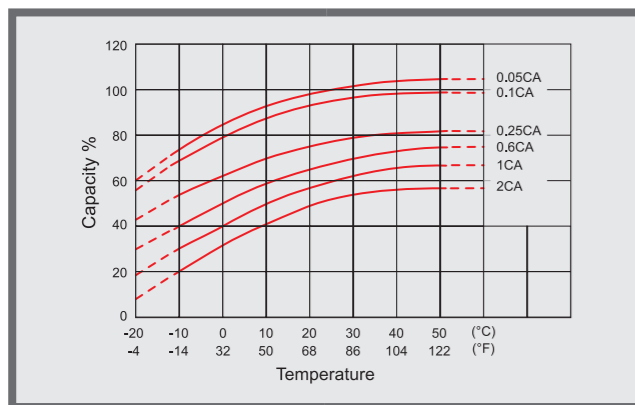


Effect of Temperature on Capacity 25°C (77°F)

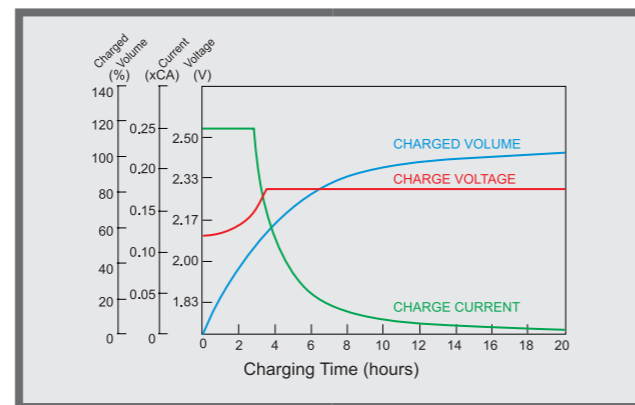

Constant Voltage Charging Characteristic (0.25CA, 25°C)

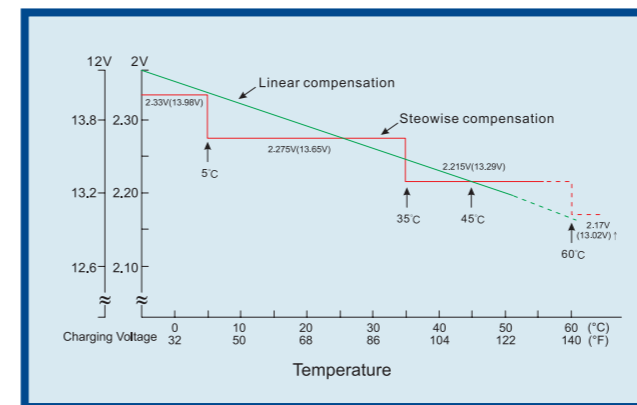


Relationship Between Charging Voltage and Temperature

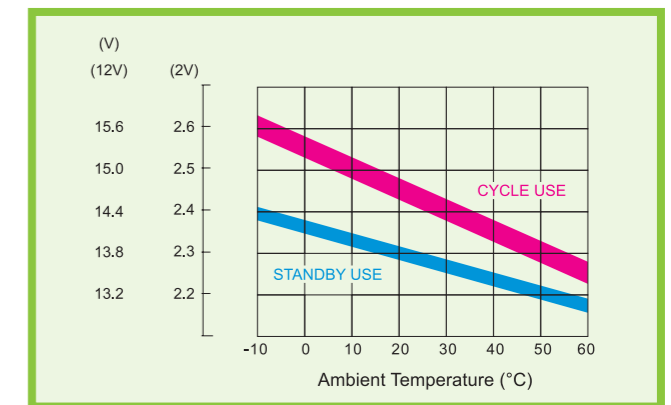


Relationship Between Charging Voltage and Temperature


CONSTRUCTION

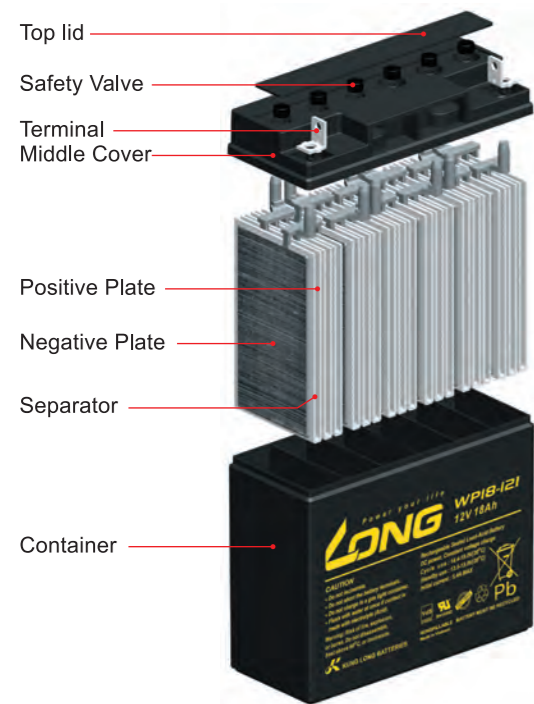


SPECIFICATIONS

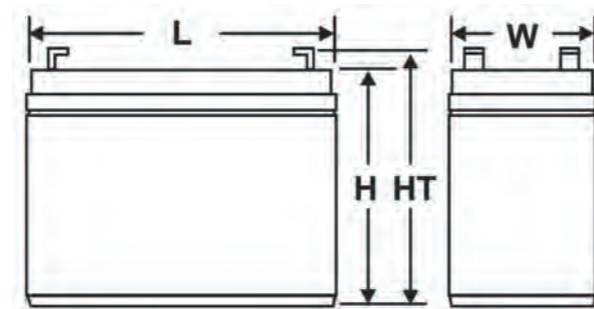



TERMINAL TYPE

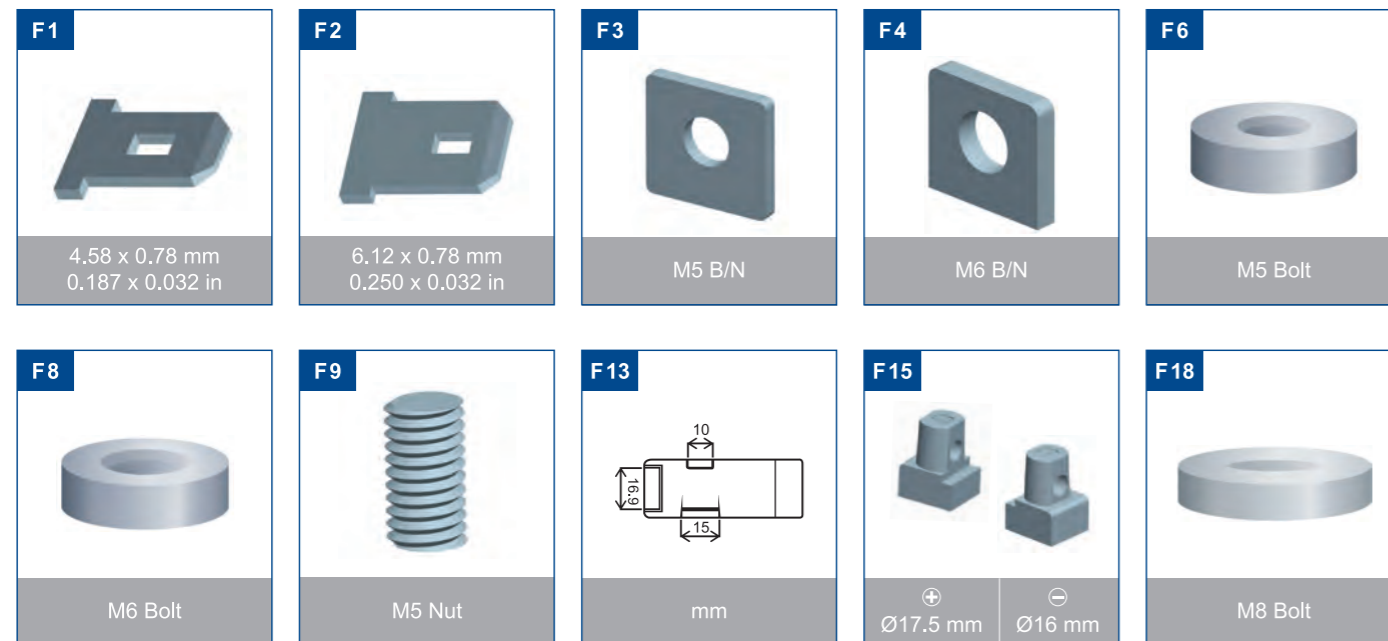

TERMINAL POSITION

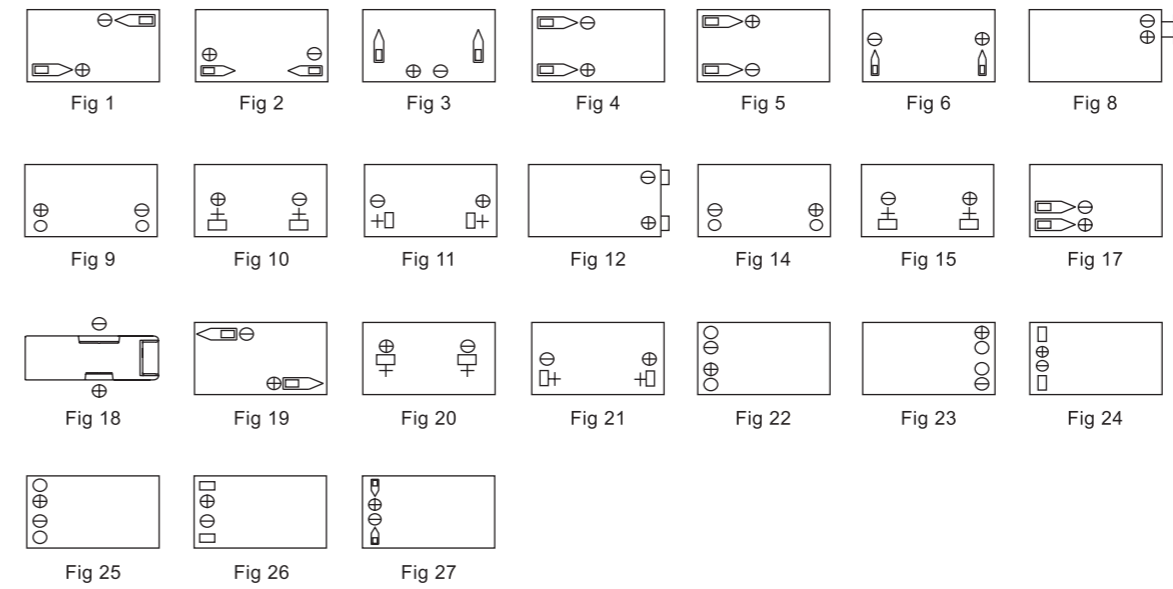

BATTERY NUMBERING SYSTEM

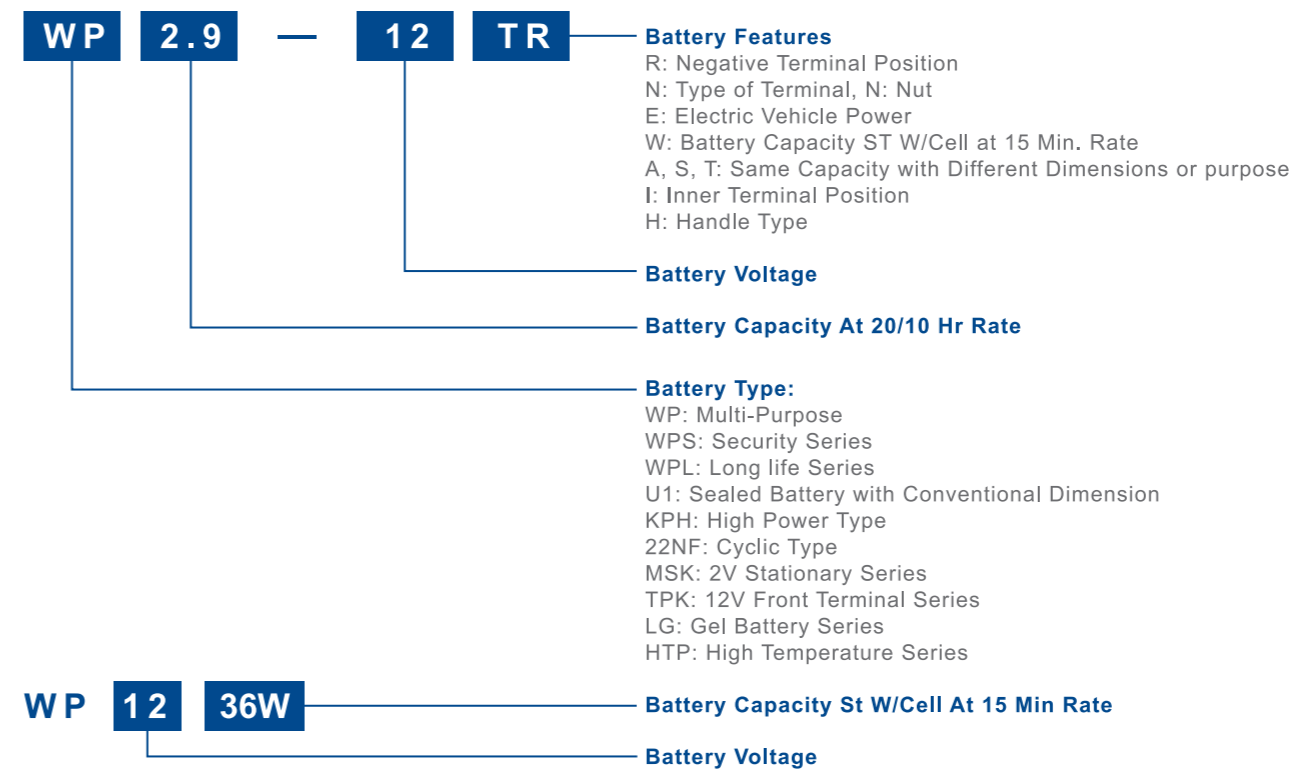

SPECIFICATION



Backup Power
For UPS, Security, Fire Alarm System



Cyclic Power
For Multi-Purpose



High Power
For Telecommunication, UPS System



Electric Vehicle Power
For Mobility Scooter, Electric Vehicle, Golf Trolley, Medical



Long Life Power
For Telecommunication, UPS System




Green Power
For Solar and Renewable Energy, Deep Cycle

MAIN APPLICATION	BATTERY TYPE	NOMINAL VOLTAGE (V)	NOMINAL CAPACITY (Ah)		DIMENSION								WEIGHT (APPROX.)		ASSEMBLY FIGURE	
			5HR	20HR	L	W	H	L	W	H	HT OVER TERMINAL		lbs	kg	TERMINAL POSITION	TERMINAL TYPE
			in	in	in	mm	mm	mm	in	mm						
MULTI-PURPOSE BATTERIES																
● ● ● ● ● ●	WP4.5-4	4	3.825	4.5	1.91	2.07	3.70	48.5	52.5	94	3.94	100	1.39	0.63	3	F2
● ● ● ● ● ●	WP9-4	4	7.65	9	3.98	1.73	3.74	101	44	95	4.02	102	2.60	1.18	3	F2
● ● ● ● ● ●	WP1.2-6	6	1.02	1.2	3.82	0.98	2.05	97	25	52	2.24	57	0.65	0.30	2	F1
● ● ● ● ● ●	WP3-6	6	2.55	3	5.28	1.34	2.32	134	34	59	2.56	65	1.47	0.67	2	F1
● ● ● ● ● ●	WP4.5-6	6	3.83	4.5	2.76	1.85	4.02	70	47	102	4.17	106	1.80	0.82	1	F1
● ● ● ● ● ●	WP5-6	6	4.25	5	2.76	1.85	4.02	70	47	102	4.17	106	1.83	0.83	1	F1
● ● ● ● ● ●	WP7-6	6	5.95	7	5.94	1.34	3.70	151	34	94	3.94	100	2.64	1.20	2	F1
● ● ● ● ● ●	WP7-6S	6	5.95	7	4.57	1.97	3.62	116	50	92	3.90	99	3.19	1.45	1	F1
● ● ● ● ● ●	WP9-6A	6	7.65	9	3.88	2.20	4.65	98.5	56	118	4.65	118	3.74	1.70	19	F1
● ● ● ● ● ●	WP10-6	6	8.5	10	5.94	1.97	3.70	151	50	94	3.94	100	3.74	1.70	2	F1
● ● ● ● ● ●	WP12-6S	6	10.2	12	5.94	1.97	3.70	151	50	94	3.90	99	4.05	1.84	2	F1
● ● ● ● ● ●	WP13-6	6	11.1	13	4.25	2.76	5.51	108	70	140	5.51	140	4.93	2.24	17	F1, F2+
● ● ● ● ● ●	WP20-6	6	17	20	6.18	3.27	4.92	157	83	125	4.92	125	8.56	3.89	20	F3
● ● ● ● ● ●	WP0.7-12	12	0.6	0.7	3.78	0.98	2.44	96	25	62	2.44	62	0.88	0.40	8	Wire/A
● ● ● ● ● ●	WP0.7-12S	12	0.6	0.7	3.78	0.98	2.44	96	25	62	2.44	62	0.88	0.40	8	Wire/J
● ● ● ● ● ●	WP1.2-12 ★	12	1.02	1.2	3.82	1.69	2.09	97	43	53	2.32	59	1.24	0.56	4	F1
● ● ● ● ● ●	WP1.2-12T	12	1.02	1.2	3.82	1.89	1.97	97	48	50	2.20	56	1.30	0.59	4	F1
● ● ● ● ● ●	WP2.2-12 ★	12	1.87	2.2	7.01	1.34	2.36	178	34	60	2.60	66	2.29	1.04	2	F1
● ● ● ● ● ●	WP2.3-12	12	1.96	2.3	7.01	1.34	2.36	178	34	60	2.60	66	2.29	1.04	2	F1
● ● ● ● ● ●	WP2.6-12	12	2.21	2.6	7.01	1.36	2.36	178	34.5	60	2.60	66	2.20	1.00	2	F1
● ● ● ● ● ●	WP2.9-12T	12	2.465	2.9	3.11	2.20	3.90	79	56	99	4.21	107	2.62	1.19	6	F1
● ● ● ● ● ●	WP2.9-12TR	12	2.465	2.9	3.11	2.20	3.90	79	56	99	4.21	107	2.62	1.19	3	F1
● ● ● ● ● ●	WP3-12	12	2.55	3	5.28	2.64	2.34	134	67	59.5	2.58	65.5	2.86	1.30	4	F1
● ● ● ● ● ●	WP1213W	12	13W	3.3	5.28	2.64	2.34	134	67	59.5	2.58	65.5	2.86	1.30	4	F2
● ● ● ● ● ●	WP4.5-12	12	3.83	4.5	3.54	2.76	3.98	90	70	101	4.21	107	3.56	1.62	3	F1
● ● ● ● ● ●	WP5-12	12	4.25	5	3.54	2.76	3.98	90	70	101	4.21	107	4.18	1.90	3	F1
● ● ● ● ● ●	WP5-12SHR	12	4.25	5	3.54	2.76	3.98	90	70	101	4.21	107	4.25	1.93	3	F2
● ● ● ● ● ●	WP1224W	12	24W	6	5.94	2.01	3.70	151	51	94	3.98	101	4.40	2.00	5	F2
● ● ● ● ● ●	WP7-12(28W) ★	12	28W	7	5.94	2.56	3.70	151	65	94	4.02	102	4.84	2.20	5	F2
● ● ● ● ● ●	WP7.2-12 ★	12	6.12	7.2	5.94	2.56	3.70	151	65	94	4.02	102	5.28	2.40	5	F1
● ● ● ● ● ●	WP1236W	12	36W	9	5.94	2.56	3.70	151	65	94	4.02	102	5.94	2.70	5	F2
● ● ● ● ● ●	WP12-12	12	10.2	12	5.94	3.86	3.66	151	98	93	3.86	98	8.84	4.02	5	F1
● ● ● ● ● ●	WP18-12 (N) SHR ★	12	15.3	18	7.13	2.99	6.57	181	76	167	6.57	167	12.32	5.60	11 (14)	F3 (F6)
● ● ● ● ● ●	WP18-12I ★	12	15.3	18	7.13	2.99	6.57	181	76	167	6.57	167	13.86	6.30	11	F3
● ● ● ● ● ●	WP18-12N ★	12	15.3	18	7.13	2.99	6.57	181	76	167	6.57	167	13.86	6.30	14	F6
● ● ● ● ● ●	WP20-12I	12	17	20	7.13	2.99	6.57	181	76	167	6.57	167	13.09	5.95	11	F3
● ● ● ● ● ●	WP20-12N	12	17	20	7.13	2.99	6.57	181	76	167	6.57	167	13.09	5.95	14	F6
● ● ● ● ● ●	WP22-12N	12	18.7	22	7.13	2.99	6.57	181	76	167	6.57	167	15.18	6.90	14	F8
● ● ● ● ● ●	WP24-12 (N) ★	12	20.4	24	6.54	6.89	4.92	166	175	125	4.92	125	17.60	8.00	21 (14)	F3 (F6)
● ● ● ● ● ●	WP26-12 (N) B	12	22.1	26	6.54	6.89	4.92	166	175	125	4.92	125	17.60	8.00	21 (14)	F3 (F6)


- VdS Approved Model ★
- For batteries' capacity below 18Ah, all dimensions given are +/- 1mm (0.04 inches)
- For batteries' capacity above 18Ah, all dimensions given are +/- 1mm (+0.08/-0.04 inches)
- Please refer to all the details of the specification sheet

MAIN APPLICATION

BATTERY TYPE	NOMINAL VOLTAGE (V)	NOMINAL CAPACITY (Ah)		DIMENSION									WEIGHT (APPROX.)		ASSEMBLY FIGURE	
		5HR	20HR 10HR	L	W	H	L	W	H	HT OVER TERMINAL		lbs	kg	TERMINAL POSITION	TERMINAL TYPE	
				in	in	in	mm	mm	mm	in	mm					

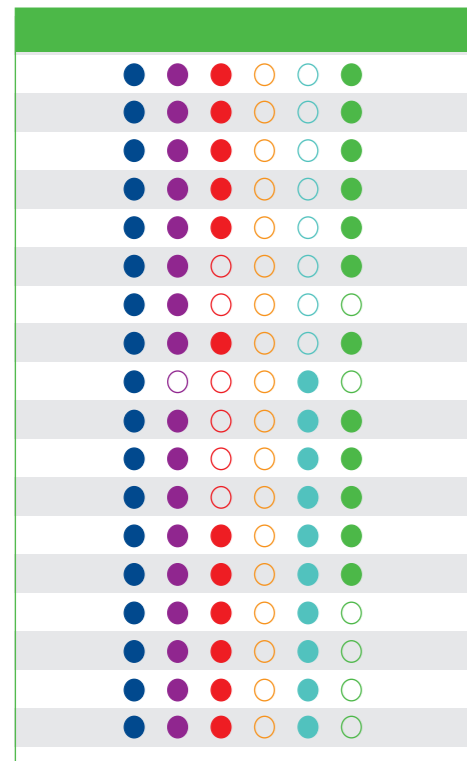

MULTI-PURPOSE BATTERIES																
WP26-12 (N) ★	12	22.1	26	6.54	6.89	4.92	166	175	125	4.92	125	20.50	9.30	21 (14)	F3 (F6)	
WP30-12T	12	25.5	30	6.54	4.94	6.93	166	125.5	176	6.93	176	23.10	10.50	21	F3	
WP40-12 (N)	12	34	40	7.83	6.54	6.73	199	166	171	6.73	171	29.70	13.50	11 (14)	F4 (F8)	
WP45-12 (N) ★	12	38.25	45	7.83	6.54	6.73	199	166	171	6.73	171	31.90	14.50	11 (14)	F4 (F8)	
WP50-12 (N)	12	42.5	50	7.83	6.54	6.73	199	166	171	6.73	171	33.22	15.10	11 (14)	F4 (F8)	
WP55-12 (N)	12	46.75	55	8.90	5.31	8.15	226	135	207	9.02 (8.43)	229 (214)	37.40	17.00	10 (9)	F15 (F8)	
WP65-12 (N) ★	12	55.25	65	13.78	6.54	6.85	350	166	174	6.85	174	51.30	23.30	15 (14)	F4 (F8)	
22NF305CN	12	52.7	62	8.90	5.31	8.15	226	135	207	8.43	214	41.10	18.70	14	F8	
KPH65-12N	12	55.25	65	10.24	6.69	7.95	260	170	202	8.15	207	47.30	21.50	9	F8	
KPH75-12N	12	63.75	75	10.24	6.69	7.95	260	170	202	8.15	207	53.20	24.20	9	F8	
KPH100-12AN (AU)	12	85	100	12.09	6.61	8.19	307	168	208	8.43 (9.06)	214 (230)	64.90	29.50	9 (10)	F8 (F15)	
KPH105-12AN	12	89.25	105	12.09	6.61	8.19	307	168	208	8.43	214	71.50	32.50	9	F8	
KPH110-12N	12	93.5	110	13.31	6.69	8.35	338	170	212	8.54	217	71.50	32.50	9	F8	
KPH115-12N	12	97.75	115	13.31	6.69	8.35	338	170	212	8.54	217	77.44	35.20	9	F8	
KPH130-12N	12	110.5	130	13.86	6.69	10.75	352	170	273	10.94	278	94.60	43.00	9	F8	
KPH135-12N	12	114.74	135	13.86	6.69	10.75	352	170	273	10.94	278	93.50	42.50	9	F8	
KPH150-12N	12	127.5	150	13.86	6.69	10.75	352	170	273	10.94	278	101.00	46.00	9	F8	
KPH155-12N	12	131.75	155	13.86	6.69	10.75	352	170	273	10.94	278	101.00	46.00	9	F8	

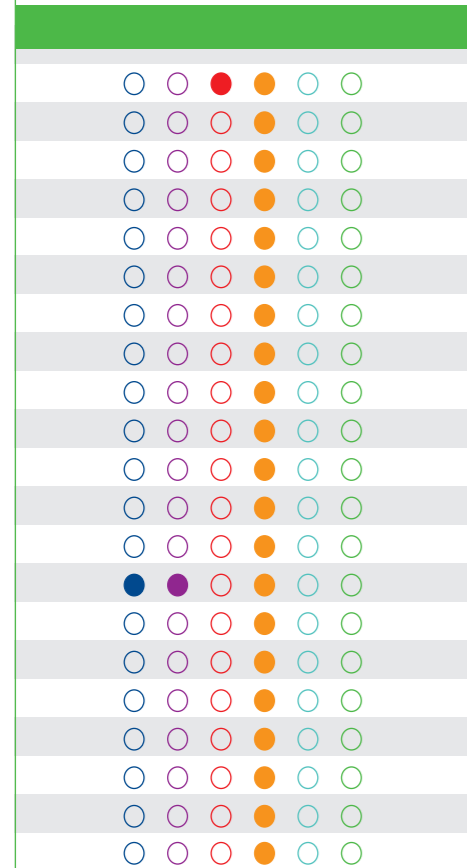

ELECTRIC VEHICLE POWER BATTERIES																
WP5-12E	12	4.25	5	3.54	2.76	3.98	90	70	101	4.21	107	4.18	1.90	3	F2	
WP10-12SE	12	8.5	10	5.94	2.56	4.41	151	65	112	4.67	118.5	7.24	3.29	5	F2	
WP12-12E	12	10.2	12	5.94	3.86	3.66	151	98	93	3.86	98	8.84	4.02	5	F2	
WP14-12SE	12	11.9	14	5.94	3.86	3.74	151	98	95	3.94	100	9.68	4.40	5	F2	
WP14-12NE	12	11.9	14	5.94	3.86	3.74	151	98	95	3.74	95	9.68	4.40	25	F6	
WP15-12(N)SE	12	12.75	15	5.94	3.90	3.86	151	99	98	4.11 (3.86)	104.5 (98)	9.90	4.50	27 (25)	F2 (F6)	
WP20-12IE	12	17	20	7.13	2.99	6.57	181	76	167	6.57	167	13.09	5.95	11	F3	
WP22-12NE	12	18.7	22	7.13	2.99	6.57	181	76	167	6.57	167	15.18	6.90	14	F8	
WP24-12ANE	12	20.4	24	7.13	3.05	6.69	181	77.5	170	6.69	170	15.18	6.90	14	F6	
WP30-12TNE	12	25.5	30	6.54	4.96	6.93	166	126	176	6.93	176	23.10	10.50	14	F8	
WP40-12(N)E	12	34	40	7.83	6.54	6.73	199	166	171	6.73	171	29.50	13.40	11(14)	F4 (F8)	
WP45-12NE	12	38.25	45	7.83	6.54	6.73	199	166	171	6.73	171	31.90	14.50	14	F8	
WP50-12NE	12	42.5	50	7.83	6.54	6.73	199	166	171	6.73	171	33.22	15.10	14	F8	
WP55-12NE	12	46.75	55	8.90	5.31	8.15	226	135	207	8.43	214	37.40	17.00	9	F8	
22NF305CNE	12	52.7	62	8.90	5.31	8.15	226	135	207	8.43	214	41.14	18.70	14	F8	
KPH75-12NE	12	63.75	75	10.24	6.69	7.95	260	170	202	8.15	207	53.70	24.40	9	F8	
U1-33H (N)	12	28.05	33	7.72	5.12	6.22	196	130	158	7.09 (6.65)	180 (169)	21.80	9.90	20 (9)	F4 (F6)	
U1-34H (N)	12	28.9	34	7.72	5.12	6.22	196	130	158	7.09 (6.65)	180 (169)	23.10	10.50	20 (9)	F4 (F6)	
U1-34HE	12	28.9	34	7.72	5.12	6.22	196	130	158	7.09	180	22.88	10.40	20	F4	
U1-36HH	12	30.6	36	7.72	5.12	6.22	196	130	158	7.09	180	23.50	10.70	20	F4	
U1-36NE	12	30.6	36	7.72	5.12	6.22	196	130	158	6.65	169	23.50	10.70	9	F8	

- VdS Approved Model ★
- For batteries' capacity below 18Ah, all dimensions given are +/- 1mm (0.04 inches)
- For batteries' capacity above 18Ah, all dimensions given are +/- 1mm (+0.08/-0.04 inches)
- Please refer to all the details of the specification sheet

SPECIFICATION

MAIN APPLICATION

BATTERY TYPE	NOMINAL VOLTAGE (V)	NOMINAL CAPACITY (Ah)		DIMENSION									WEIGHT (APPROX.)		ASSEMBLY FIGURE	
		5HR	20HR	L	W	H	L	W	H	HT OVER TERMINAL		lbs	kg	TERMINAL POSITION	TERMINAL TYPE	
		10HR	in	in	in	mm	mm	mm	in	mm						

BACKUP POWER BATTERIES

WPS4-6	6	3.4	4	2.76	1.85	4.02	70	47	102	4.17	106	1.64	0.75	1	F1
WPS2.3-12	12	1.96	2.3	7.01	1.34	2.36	178	34	60	2.60	66	1.91	0.87	2	F1
WPS4-12	12	3.4	4	3.54	2.76	3.98	90	70	101	4.21	107	3.52	1.60	3	F1
WPS5-12	12	4.25	5	3.54	2.76	3.98	90	70	101	4.21	107	3.56	1.62	3	F1
WPS7-12	12	5.65	7	5.94	2.56	3.70	151	65	94	4.02	102	4.62	2.10	5	F1
WPS7.2-12 ★	12	6.12	7.2	5.94	2.56	3.70	151	65	94	4.02	102	5.17	2.35	5	F1
WPS7.5-12	12	6.375	7.5	5.94	2.56	3.70	151	65	94	4.02	102	5.06	2.30	5	F1
WPS12-12 ★	12	10.2	12	5.94	3.86	3.66	151	98	93	3.86	98	8.25	3.75	5	F1
WPS17-12	12	13.73	17	7.13	2.99	6.57	181	76	167	6.57	167	10.58	4.81	11	F3
WPS40-12(N) ★	12	34	40	7.83	6.54	6.73	199	166	171	6.73	171	27.70	12.60	11 (14)	F4 (F8)



LONG LIFE POWER BATTERIES

WPL5-12	12	4.25	5	3.54	2.76	3.98	90	70	101	4.21	107	4.18	1.90	3	F1
WPL7.2-12	12	6.12	7.2	5.94	2.56	3.70	151	65	94	4.02	102	5.28	2.40	5	F1
WPL1235W	12	35	8.5	5.94	2.56	3.70	151	65	94	4.02	102	5.94	2.70	5	F2
WPL12-12	12	10.2	12	5.94	3.86	3.66	151	98	93	3.86	98	8.84	4.02	5	F1
WPL18-12SHR	12	15.3	18	7.13	2.99	6.57	181	76	167	6.57	167	12.32	5.60	11	F3
WPL26-12(N)B	12	22.1	26	6.54	6.89	4.92	166	175	125	4.92	125	17.60	8.00	21 (14)	F3 (F6)
WPL26-12 (N)	12	22.1	26	6.54	6.89	4.92	166	175	125	4.92	125	20.50	9.30	21 (14)	F3 (F6)
WPL26-12TN	12	22.1	26	6.54	4.94	6.89	166	125.5	175	6.89	175	21.60	9.80	14	F6
WPL28-12TN	12	23.8	28	6.54	4.94	6.89	166	125.5	175	6.89	175	21.60	9.80	14	F6
WPL28-12TM	12	23.8	28	6.54	4.94	6.89	166	125.5	175	6.89	175	21.60	9.80	14	F9
WPL34-12N	12	28.9	34	7.76	5.16	6.26	197	131	159	6.69	170	23.10	10.50	9	F6
WPL40-12 (N)	12	34	40	7.83	6.54	6.73	199	166	171	6.73	171	29.70	13.50	11 (14)	F4 (F8)
WPL45-12 (N)	12	38.25	45	7.83	6.54	6.73	199	166	171	6.73	171	32.30	14.70	11 (14)	F4 (F8)
WPL50-12 (N)	12	42.5	50	7.83	6.54	6.73	199	166	171	6.73	171	33.22	15.10	11 (14)	F4 (F8)
WPL55-12 (N)	12	46.75	55	8.90	5.31	8.15	226	135	207	9.02 (8.43)	229 (214)	37.40	17.00	10 (9)	F15 (F8)
WPL60-12AN	12	51	60	13.78	6.57	7.05	350	167	179	7.05	179	45.10	20.50	14	F8
WPL60-12ARN	12	51	60	13.78	6.57	7.05	350	167	179	7.05	179	45.10	20.50	9	F8
WPL65-12 (N)	12	55.25	65	13.78	6.54	6.85	350	166	174	6.85	174	51.30	23.30	15 (14)	F4 (F8)
WPL65-12AN	12	55.25	65	13.78	6.57	7.05	350	167	179	7.05	179	46.00	20.90	14	F8
WPL65-12ARN	12	55.25	65	13.78	6.57	7.05	350	167	179	7.05	179	46.00	20.90	9	F8
WPL100-12N	12	85	100	12.97	6.78	8.46	329.5	172.3	215	8.74	222	68.90	31.30	14	F18
WPL100-12RN	12	85	100	12.97	6.78	8.46	329.5	172.3	215	8.74	222	68.90	31.30	9	F18
WPL120-12N	12	102	120	16.06	6.97	8.82	408	177	224	8.82	224	81.40	37.00	14	F18
WPL120-12RN	12	102	120	16.06	6.97	8.82	408	177	224	8.82	224	81.40	37.00	9	F18
WPL125-12N	12	106.25	125	16.06	6.97	8.82	408	177	224	8.82	224	88.00	40.00	14	F18
WPL130-12N	12	110.5	130	19.02	6.69	9.45	483	170	240	9.45	240	93.70	42.60	9	F18
WPL150-12N	12	127.5	150	19.02	6.69	9.45	483	170	240	9.45	240	100.00	45.50	9	F18
WPL12550WN	12	550W	155	19.02	6.69	9.45	483	170	240	9.45	240	110.00	49.80	9	F18
WPL155-12N	12	131.75	155	19.02	6.69	9.45	483	170	240	9.45	240	106.00	48.20	9	F18

- VdS Approved Model ★
- For batteries' capacity below 18Ah, all dimensions given are +/- 1mm (0.04 inches)
- For batteries' capacity above 18Ah, all dimensions given are +/- 1mm (+0.08/-0.04 inches)
- Please refer to all the details of the specification sheet

SPECIFICATION

MAIN APPLICATION

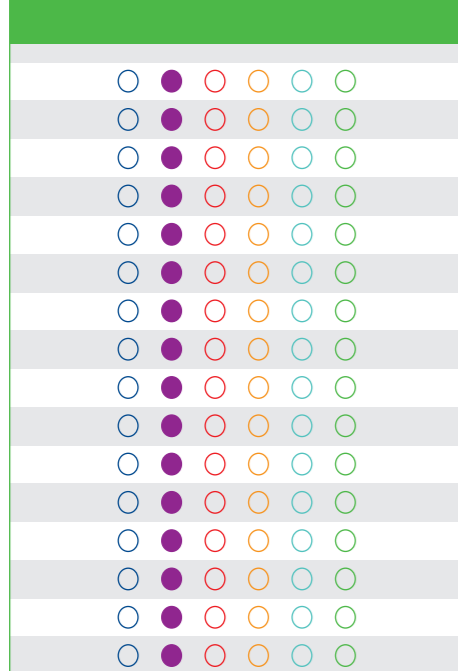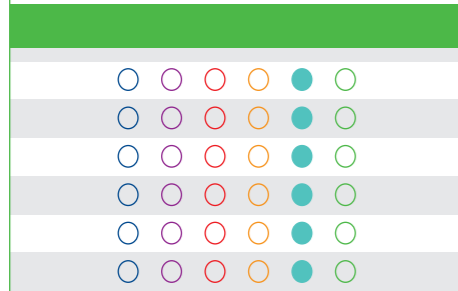

BATTERY TYPE	NOMINAL VOLTAGE (V)	NOMINAL CAPACITY (Ah)			DIMENSION								WEIGHT (APPROX.)		ASSEMBLY FIGURE	
		5HR	20HR		L	W	H	L	W	H	HT OVER TERMINAL		lbs	kg	TERMINAL POSITION	TERMINAL TYPE
			10HR								in	in				
LONG LIFE POWER BATTERIES																
WPL200-12BN	12	170	200	20.55	9.37	8.62	522	238	219	8.82	224	135.00	61.50	22	F18	
WPL200-12N	12	170	200	20.55	9.37	8.62	522	238	219	8.82	224	146.00	66.50	22	F18	
WPL230-12N	12	195.5	230	20.55	9.37	8.62	522	238	219	8.82	224	161.00	73.20	22	F18	
SPECIAL TYPE																
WP2-12	12	1.7	2	5.91	0.79	3.54	150	20	90	3.54	90	1.63	0.74	12	F1	
WP1250	12	1.7	2	5.63	0.91	2.52	143	23	64	2.52	64	1.43	0.65	18	F13	
WP1222A	12	1.7	2	7.17	0.91	2.40	182	23	61	2.40	61	1.61	0.73	18	F13	
WP1223A	12	1.79	2.1	7.17	0.91	2.40	182	23	61	2.40	61	1.57	0.71	18	F13	
2V STATIONARY BATTERIES																
MSK75	2	63.75	75	6.69	2.83	8.07	170	72	205	8.19	208	14.08	6.40	-	F18	
MSK100A	2	85	100	6.69	2.83	8.07	170	72	205	8.19	208	16.50	7.50	-	F18	
MSK200	2	170	200	6.69	4.17	13.11	170	106	333	13.31	338	30.80	14.00	-	F18	
MSK300	2	255	300	6.69	5.91	13.11	170	150	333	13.31	338	46.60	21.20	-	F18	
MSK400	2	340	400	7.76	6.69	13.11	197	170	333	13.31	338	61.60	28.00	-	F18	
MSK440	2	374	440	7.76	6.69	13.11	197	170	333	13.31	338	65.30	29.70	-	F18	
GEL BATTERIES																
LG7-12	12	5.95	7	5.94	2.56	3.7	151	65	94	4.02	102	5.28	2.40	5	F2	
LG12-12	12	10.2	12	5.94	3.86	3.66	151	98	93	3.86	98	8.87	4.03	5	F2	
LG17-12	12	14.45	17	7.13	2.99	6.57	181	76	167	6.57	167	13.82	6.28	21	F3	
LG24-12	12	20.4	24	6.54	6.89	4.92	166	175	125	4.92	125	20.90	9.50	21	F3	
LG32-12	12	27.2	32	7.72	5.12	6.22	196	130	158	7.09	180	23.10	10.40	20	F4	
LG36-12N	12	30.6	36	7.72	5.12	6.22	196	130	158	6.65	169	23.50	10.70	9	F8	
LG40-12 (N)	12	34	40	7.83	6.54	6.73	199	166	171	6.73	171	29.30	13.30	11 (14)	F4 (F8)	
LG45-12 (N)	12	38.25	45	7.83	6.54	6.73	199	166	171	6.73	171	33.00	15.00	11 (14)	F4 (F8)	
LG50-12 (N)	12	42.5	50	7.83	6.54	6.73	199	166	171	6.73	171	33.64	15.29	11 (14)	F4 (F8)	
LG50-12N	12	42.5	50	7.83	6.54	6.73	199	166	171	6.73	171	31.90	14.50	14	F8	
LG55-12N	12	46.75	55	8.9	5.31	8.15	226	135	207	8.43	214	37.40	17.00	9	F8	
LG22NF305CN	12	52.7	62	8.9	5.31	8.15	226	135	207	8.43	214	40.70	18.50	14	F8	
LG65-12	12	55.25	65	13.78	6.54	6.85	350	166	174	6.85	174	52.60	23.90	15	F4	
LGK75-12N	12	63.75	75	10.24	6.69	7.95	260	170	202	8.15	207	54.60	24.80	9	F8	
LGK100-12N	12	85	100	13.31	6.69	8.35	338	170	212	8.54	217	74.80	34.00	9	F8	
LGL150-12N	12	127.5	150	19.02	6.69	9.45	483	170	240	9.45	240	100.76	45.80	9	F18	


- For batteries' capacity below 18Ah, all dimensions given are +/- 1mm (0.04 inches)
- For batteries' capacity above 18Ah, all dimensions given are +/- 1mm (+0.08/-0.04 inches)
- Please refer to all the details of the specification sheet




CHARACTERISTIC

Discharge current (A)	Final discharge Voltage (V/cell)
(A) ≤ 0.2C	1.75
0.2C < (A) ≤ 0.5C	1.70
0.5C < (A) ≤ 3.0C	1.60
(A) > 3.0C	1.40


Discharge current and final discharge voltage

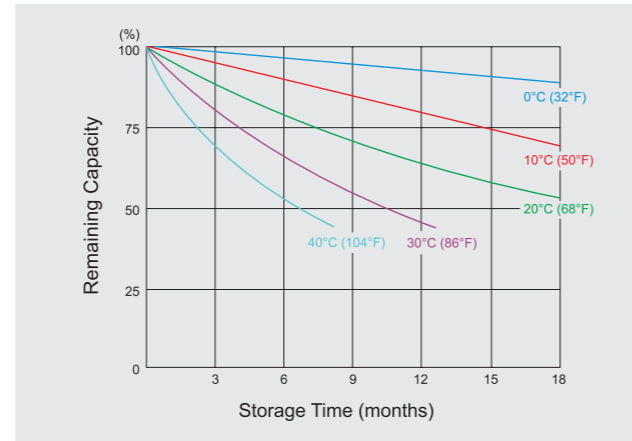


Capacity Retention Characteristic

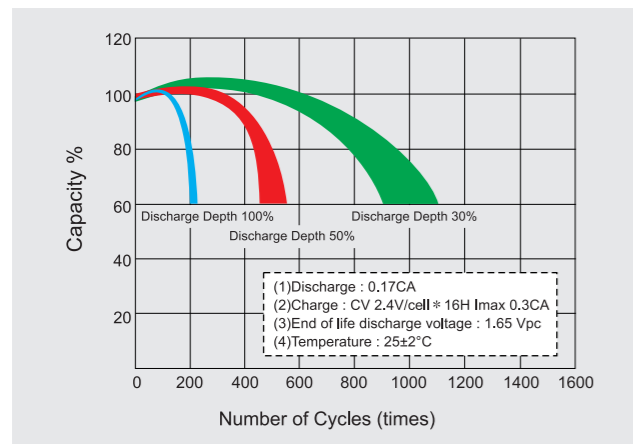


Cycle Service Life

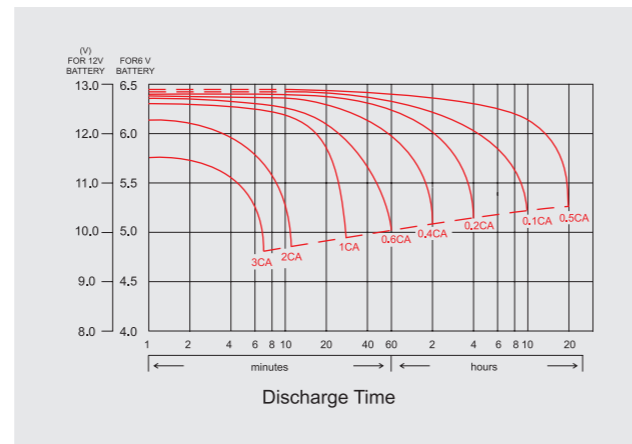

Discharge Time VS. Discharge Current (25°C) (77°F)

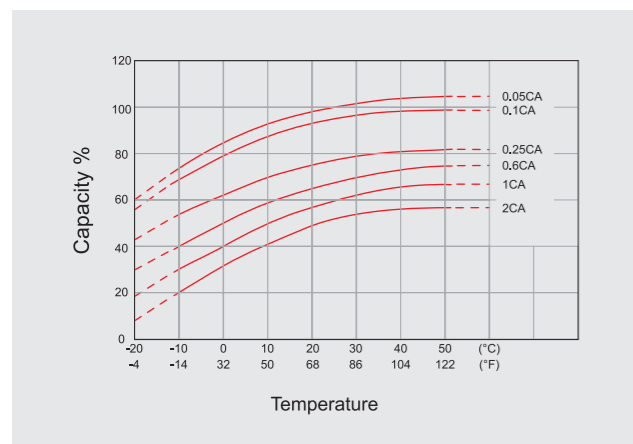

Effect of Temperature on Capacity 25°C (77°F)

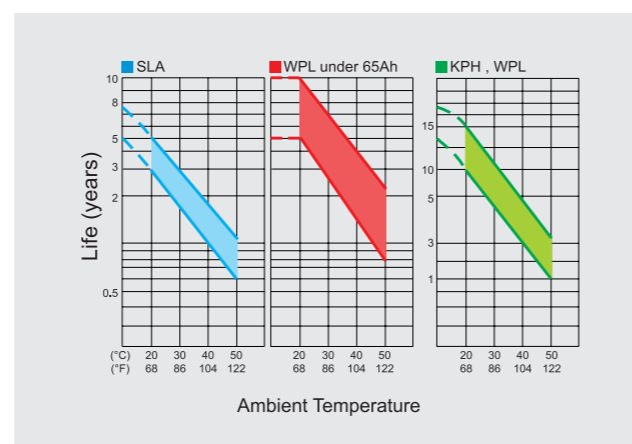

Trickle (or float) Service Life

CHARGING METHOD

APPLICATION	STANDBY USE	CYCLE USE
Charging method	Constant voltage	
Setting voltage (V/cell)	2.25~2.30	2.40~2.50
Temperature factor	-3.0mV/°C/cell	-5.0mV/°C/cell
Max. charge current (CA)	0.3	0.3
Charge Time	Discharge 100%	24h
	Discharge 50%	20h
Temperature (°C)	-15°C~40°C	

CHARGING METHOD

High performance and long service life of LONG battery depend upon correct charging. Improper charging modes or inadequate charging equipment result in decreased battery life and/or unsatisfactory performance.

Any of the conventional charging techniques may be used, but to obtain maximum service life and capacity, along with acceptable recharge time, constant current/constant voltage charging is recommended.

A charge quantity of 105-120% of the previous discharged quantity is needed for fully charging the battery. The charging voltage of battery decreases with increasing temperature and increases with decreasing temperature. At a temperature below 5°C (41°F) or above 35°C (95°F), the temperature compensation for charging voltage is necessary. At ambient temperature the compensation will not be necessary. Overcharging Should be avoided : As a result of too high a charge voltage, excessive current will flow after reaching full charge, causing decomposition of water in the electrolyte and, hence, premature aging.

Undercharging Should also be avoided : If too low a charge voltage is applied, the charger current output will essentially stop before the battery is fully charged. This allows some of the lead sulfate to remain on the plates which will eventually reduce capacity.

RECOMMENDED RECHARGING INTERVAL & METHOD	
STORAGE TEMPERATURE	RECHARGE INTERVAL & METHOD
Below 20°C (68°F)	9 months, charge for 5~8 hrs at 2.4V/cell
20°C-30°C (68°F-86°F)	6 months, charge for 5~8 hrs at 2.4V/cell
above 30°C (86°F) (avoid this storage condition)	3 months, charge for 5~8 hrs at 2.4V/cell

HANDLING INSTRUCTION

- Do not short the terminals.
- Do not place the battery near or in fires.
- Do not use the battery in a container or bag without proper ventilation.
- Operate at a temperature between -15°C. To 50°C. But for cycle use, the 5°C to 35°C temperature range is recommended.
- To properly store the battery, remove battery from equipment or charge and store in a dry and cool place.
- Immediately recharge after discharging.
- If sulfuric acid from the battery is spilled on skin or clothing, wash immediately with water. If acid comes in contact with eyes, flush with large amounts of water and immediately see a doctor.
- To obtain maximum life, the ripple current at the r.m.s current of the charger should be regulated to less than 0.1 C (A).
- Avoid mixed use of batteries. Different capacities, histories, or manufacturers of batteries may cause damage to the batteries or other equipment's.

COMPANY INTRODUCTION

ABOUT KUNG LONG



Established 27 years ago, Kung Long Batteries Industrial Co., Ltd. is the only professional lead-acid battery manufacturer in Taiwan that owns a bonded factory and is also listed on the Taiwan Stock Exchange. Thirty percent compound growth has been achieved in the annual number of batteries shipped for the past five years, generating NTD\$4 billion in revenue income. We have adopted the manufacturing and sales policy of international labor distribution as spreading manufacturing risks while expanding the market for potential sales. Since 1996, we established a factory in the Ben Luc District in Vietnam, which made us to become a first completely foreign-owned corporation to construct a battery production base in the locality. Thereafter, we passed ISO9001 and ISO14001 accreditation in 1999 and 2000, respectively. We passed OHSAS18001 accreditation, and also became a listed company in Taiwan in 2002. Construction of our 200,000m² Duc Hoa factory in Vietnam was finished in 2007. Then we passed TL9000 communications/telecommunications electronics industry quality system certification in 2008. At the end of 2009, the second and third stage expansion projects for the Duc Hoa factory began, and these projects are still ongoing in 2010.



In terms of product manufacturing, Kung Long possesses strict standards for each step of the manufacturing process, along with revolutionary innovations and implementations in the technology system, management methods and administrative procedures. Under precise manufacturing standards and insurance of product compliance of quality management systems, our entire collection of sealed battery products have passed UL safety standards. In addition, we have also passed German VdS certification to meet quality demands of the security system market in the European region. Renowned international corporations both domestic and overseas have voiced support and affirmation of our products' quality. We believe that customer satisfaction is not only from the product itself, but is also built from immediate service and establishment of a friendly working relationship with clients those are measures to provide extra value and enhance customer satisfaction. Thus, Kung Long earned the Gold Award for Customer Satisfaction, and also earned the honor of the Taiwan Excellence Award from the Ministry of Economic Affairs.



Our innovative developments stem from abundant experience and energy. With our competitive advantage of a broad, complete product line and flexible manufacturing technologies, Kung Long has developed more than 400 types of batteries for various usages. We continue developing batteries for renewable energy applications, such as electric vehicles, solar power and wind power. Because of our untiring efforts of product innovation and development and proactive attitude, since 1993 Kung Long has cooperated with the Industrial Technology Research Institute's Material & Chemical Research Laboratories on the development of deep-cycle sealed batteries, electric scooter batteries, and high-power surface modified batteries. We have also introduced new technologies from many sources and invested in a multitude of advanced facilities, demonstrating our mission and promise to provide state-of-the-art services to customers while we are pursuing sustainable development.

Taiwanese Origins, Vietnamese Roots, and World Vision are Kung Long's main concern. Kung Long's goal is to provide clean energy for global consumers while upholding social and environmental responsibilities to promote continual growth, sustained development and untiring efforts within the company.



HISTORY

Our expertise comes from our ample experiences

