

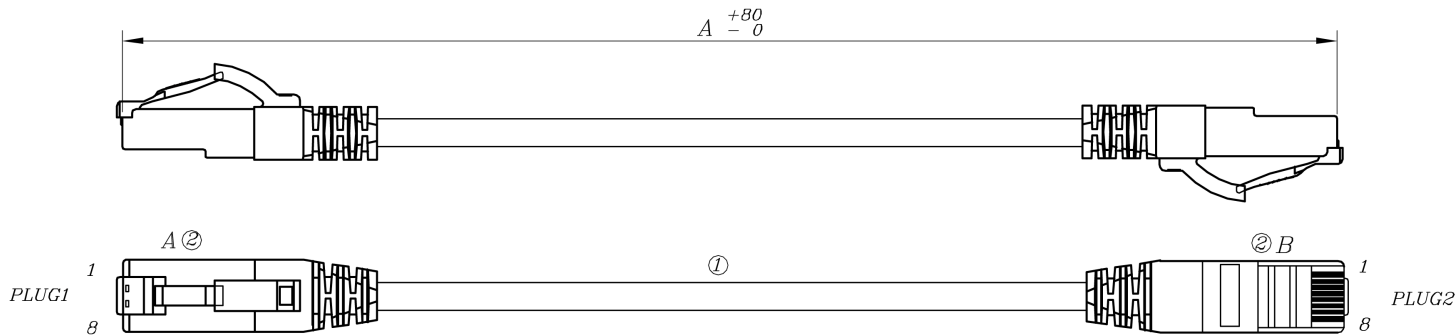


TTL NETWORK GMBH

1872-xxM-UF 0,5M - 10,0M



ARRANGE METHOD:



Remark:

- ① Cable: Cat. 6A S/FTP, Stranded Bare Copper, 4Pairs Wires, 26AWG, Jacket LSOH-TPE, OD: 6.5mm.
- ② Plug: Cat. 6 Shielded Type Plug with 3 Prongs, 50u", 8P8C, UL94-V2, Mating Cycle >1200.
- ③ Packing: 1PC/PE Bag with Label.
- ④ Printing: CAT. 6A S/FTP TPE 4PR 26AWG.

Testing: 100% Cat. 6A Channel Test.
All materials are RoHS compliant.



CUT LINE AND ARRANGE CRITERION				CUT LINE AND ARRANGE CRITERION			
No.	Total length (MM)	OD of packing roll (MM)	Cable tie (MM)	No.	Total length (MM)	OD of packing roll (MM)	Cable tie (MM)
1	300	/	/	19	13000	120	175
2	500	/	/	20	14000	120	180
3	1000	175	60	21	15000	120	205
4	1500	175	70	22	16000	120	210
5	2000	175	75	23	17000	120	215
6	2500	175	80	24	18000	120	220
7	3000	155	95	25	19000	120	225
8	3500	155	100	26	20000	120	235
9	4000	155	110	27	25000	120	265
10	5000	155	120	28	30000	120	315
11	6000	135	130	29	40000	120	365
12	7000	135	135	30	50000	120	415
13	7500	135	140	31	60000	120	465
14	8000	135	145	32	70000	120	515
15	9000	135	150	33	80000	120	565
16	10000	120	165	34	90000	120	615
17	11000	120	170	35	100000	120	665
18	12000	120	175	36			

WIRE CONNECTION TABLE								LENGTH	MOLD NO.
white/orange	orange	white/green	blue	white/blue	green	white/brown	brown		
A1	A2	A3	A4	A5	A6	A7	A8	(A+80)*[19(0)]*[19(0)]	02-032
B1	B2	B3	B4	B5	B6	B7	B8		

DWG NO.

P6AS/FTB032-001

TITLE

CAT.6A S/FTP PATCH CORD(0.5M-10M)

UNIT	SCALE	SHEET
mm	1/1	1/1
DRAWN DATE	PROJ.	REV
2013/08/08		1
APPROVAL	CHECKED	DRAWN
		CathyLi